



Joint Base Pearl Harbor-Hickam (JBPHH) Public Water System No. HI0000360

Drinking Water Distribution System Recovery Plan: Stage 5 Long-Term Monitoring (LTM) Month 2 Sampling Results Report for Zone A3 17 June 2022



Neighborhoods included in Zone A3: Iroquois Point






EXECUTIVE SUMMARY FOR ZONE A3

This report documents the results of long-term monitoring (LTM) testing for Zone A3. We are sharing this information with you to keep you updated on your water quality.

This LTM testing was performed after the November 29, 2021 Public Health Advisory for the JBPHH Public Water System for Zone A3 was amended by the Hawaii Department of Health (DOH) on March 13, 2022. The amended health advisory for Zone A3 can be found online at: https://jbphh-safewaters.org. The amended health advisory states that tap water can be used for all purposes including drinking, cooking, oral hygiene, and consumption by pets. The health advisory was amended based on a final review of all sample data and how the Navy water system maintains operations to ensure safe drinking water. Test results that led to the advisory amendment are summarized in the Stage 4 Residential Sampling Report. After the health advisory was amended, residents were informed that they can safely use their water for all purposes.

Zone A3 has been thoroughly flushed, sampled, and tested. This zone has completed each stage (i.e., Stage 1 – Distribution System Flushing through Stage 4 – Building Sampling) outlined in the Drinking Water Distribution System Recovery Plan. 1 Based on the samples collected and tested from water mains (Stage 2), residences, buildings, and schools (Stage 4), this zone meets the U.S. Environmental Protection Agency (EPA) and DOH drinking water standards used during this investigation. Zone A3 is now in the LTM phase (a.k.a., Stage 5), which is described below. For additional information on the Stage 2, Stage 4, and Stage 5 sample results by zone, please visit: https://jbphhsafewaters.org.

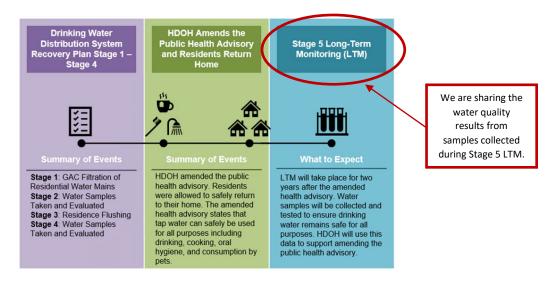

¹ The Drinking Water Distribution System Recovery Plan was developed and approved by the Interagency Drinking Water System Team (IDWST). The DOH, EPA, Navy, and Army formed the IDWST to restore safe drinking water to all Navy Water System users. The JBPHH PWS #HI0000360 & ARM PWS #HI0000337 will continue the work of the IDWST by working to restore consumer confidence by ensuring tap water continues to be safe for human consumption (e.g., drinking, cooking, oral hygiene).

i





Long-Term Monitoring

LTM will be performed as outlined in the Drinking Water Sampling Plan, dated December 2021. LTM will take place for two years after the date of the amended health advisory. The purpose of LTM is to ensure tap water continues to be safe for human consumption (e.g., drinking, cooking, oral hygiene). Residents/occupants will be notified if and when their house/building is scheduled to be sampled. Below is the schedule for LTM in Zone A3.

LTM Schedule for Zone A3

Sampling Event ¹	Summary of Sampling Activities	Completion Date ²
Month 1	5% of houses/buildings (minimum of 5 houses/building)	April 4 –
WOTHT	0 /0 of Hodoco/ballalligo (Hillillian of o Hodoco/ballallig)	April 7, 2022
Month 2	5% of houses/buildings (minimum of 5 houses/building)	April 25 –
MOHUI Z	5 % of flouses/buildings (fillillituit) of 5 flouses/building)	May 11, 2022
Month 3	5% of houses/buildings (minimum of 5 houses/building)	June 2022
Month 9	10% of houses/buildings (minimum of 15 houses/buildings)	December 2022
Month 15	10% of houses/buildings (minimum of 15 houses/buildings)	June 2023
Month 21	10% of houses/buildings (minimum of 15 houses/buildings)	December 2023
Month 24	10% of houses/buildings (minimum of 15 houses/buildings)	March 2024

² Completion dates are estimated based on the date the DOH health advisory was amended for this zone.

¹ Sampling events are scheduled based on the amount of time (months) since the DOH health advisory was amended for this zone.



Tables Included in this Stage 5 Sampling Results Report for Zone A3

Table	Description Page
Table 1-1.	Contaminants Detected in Drinking Water Samples Collected from Residences in Zone A3
Table 1-2.	Contaminants Detected in Drinking Water Samples Collected from Schools in Zone A3
Table 1-3.	Contaminants Detected in Drinking Water Samples Collected from Child Development Centers in Zone A35
Table 1-4.	Contaminants Detected in Drinking Water Samples Collected from Other Buildings in Zone A36
Table 1-5.	Contaminants Detected in Drinking Water Samples Collected from Fire Hydrants in Zone A3
Table 1-6.	Contaminants Detected in Drinking Water Samples Collected from JBPHH's Source Water (Waiawa Shaft – Post Chlorination)





Table 1-1. Contaminants Detected in Drinking Water Samples Collected from Residences in Zone A3

Table 1-1. Contami	inants Detected in Drin	king v	vater Sa	mples Co	pliected	from Res	sidences	s in Zone	A3											
						Sampling nmary	Sampling	e 5 LTM g Summary onth 1		M Sampling y Month 2		M Sampling y Month 3	Stage 5 LTI Summary	M Sampling y Month 9		M Sampling y Month 15		M Sampling Month 21		M Sampling y Month 24
					02/04/22	- 02/09/22	04/04/22	- 04/07/22	04/26/22	- 05/11/22	June	2022	Decemb	er 2022	June	e 2023	Decem	ber 2023	Marc	h 2024
Contaminant Contaminants of Concern	Typical Source of Contaminant	Units	DOH Project Screening Level	Basis of DOH Screening Level ²	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³
Benzene	Discharge from factories; Leaching from gas storage tanks and landfills	ppb ⁶	5.0	MCL	0/180	-	0/83	-	0/82	-										
Ethylbenzene	Discharge from petroleum refineries	ppb	700	MCL	0/180	-	0/83	-	0/82	-										
Toluene	Discharge from petroleum factories	ppb	1,000	MCL	0/180	-	0/83	-	0/82	-										
Xylenes (total)	Discharge from petroleum factories; Discharge from chemical factories	ppb	10,000	MCL	0/180	-	0/83	-	0/82	-										
1-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also, present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites.	ppb	10	EAL	0/180		0/83	-	0/82	-	_				These sar	nples will be	These san	nples will be	These san	nples will be
2-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also used to make vitamin K; and is present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	EAL	0/180	-	0/83	-	0/82	-	collected 3 the health a amended.	d in a LTM Sampling	collected 9	dvisory was Results will d in a LTM Sampling	collected after the he was amen will be re LTM M Samplin	15 months ealth advisory ded. Results ported in a flonth 15 ng Results	collected after the he was amend will be re LTM M Samplin	21 months alth advisory ded. Results corted in a lonth 21 g Results	collected after the he was amend will be re LTM M Samplin	24 months ealth advisory ded. Results ported in a flonth 24 ng Results
Naphthalene	Naphthalene is found in coal tar or crude oil and is used in the manufacture of plastics, resins, fuels, and dyes, and as a fumigant	ppb	17	EAL	0/180	-	0/83	-	0/82	-	recure	rtoport.	results	rtoport.	Re	port.	Re	port.	Re	port.
Total TPH ⁴	TPH is petroleum and can contaminate drinking water through spills and other releases into the environment	ppb	211	ISP	14/180	ND - 179 (77)	16/83	ND - 163 (65)	7/82	ND - 159 (71)										
Total Organic Carbon (TOC) ⁵	Naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources	ppb	4,000	ISP	75/180	ND – 7,410 (2,058)	0/83	-	2/82	ND - 620 (475)										
Free Chlorine (Field Test) ⁸	Water additive used to control microbes	ppb	4,000	ISP			73/73	30 - 860 (544)	75/75	20 – 1,690 (462)										
Metals	·																			
Antimony	Discharge from petroleum refineries; fire retardants; ceramics; electronics; solder	ppb	6.0	MCL	1/180	ND - 0.077 (0.077)	0/83	-	8/82	ND - 0.18 (0.14)		ples will be		ples will be		nples will be 15 months		nples will be 21 months		nples will be 24 months
Barium	Discharge of drilling wastes; Discharge from metal refineries; Erosion of natural deposits	ppb	2,000	MCL	180/180	0.33 - 29 (2.2)	83/83	1.8 - 2.6 (2.0)	82/82	1.9 - 2.3 (2.0)	the health a amended.		amended.	dvisory was Results will	after the he was amen will be re	ealth advisory ded. Results ported in a	after the he was amend will be re	alth advisory ded. Results ported in a	after the he was amend will be re	ealth advisory ded. Results ported in a
Beryllium	Discharge from metal refineries and coal-burning factories; Discharge from electrical, aerospace, and defense industries	ppb	4.0	MCL	1/180	ND - 0.12 (0.12)	0/83	-	1/82	ND - 0.16 (0.16)	Month 3	d in a LTM Sampling Report.	be reporte Month 9 Results	Sampling	LTM M Samplin	Nonth 15 ng Results port.	LTM M Samplin	onth 21 g Results port.	LTM M Samplin	Month 24 ng Results port.

1





Cadmium	D 1 4 6 1 1 1 1														
Caumum	By-product of drinking water disinfection	ppb	5.0	MCL	1/180	ND - 0.066 (0.066)	0/83	-	1/82	ND - 0.14 (0.14)					
Chromium	Discharge from steel and pulp mills; Erosion of natural deposits	ppb	100	MCL	171/180	ND - 1.8 (1.5)	83/83	1.1 – 2.0 (1.6)	82/82	0.58 - 1.5 (1.1)					
Copper	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	1,300	MCL	180/180	7.8 - 201 (40)	83/83	5.2 - 72 (29)	82/82	3.8 - 118 (32)					
Lead	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	15	MCL	162/180	ND - 2.2 (0.38)	69/83	ND - 1.4 (0.32)	72/82	ND - 3.1 (0.42)	These samples will be collected 3 months after the health advisory was	These samples will be collected 9 months after the health advisory was	These samples will be collected 15 months after the health advisory was amended. Results	These samples will be collected 21 months after the health advisory was amended. Results	These samples will be collected 24 months after the health advisory was amended. Results
Mercury	Erosion of natural deposits; Discharge from refineries and factories; Runoff from landfills; Runoff from cropland	ppb	2.0	MCL	15/180	ND - 0.34 (0.17)	0/83	-	7/82	ND - 0.055 (0.038)	amended. Results will be reported in a LTM Month 3 Sampling Results Report.	amended. Results will be reported in a LTM Month 9 Sampling Results Report.	will be reported in a LTM Month 15 Sampling Results Report.	will be reported in a LTM Month 21 Sampling Results Report.	will be reported in a LTM Month 24 Sampling Results Report.
Selenium	Discharge from petroleum and metal refineries; Erosion of natural deposits; Discharge from mines	ppb	50	MCL	20/180	ND - 2.1 (1.6)	0/83	-	44/82	ND - 1.5 (0.81)					
Thallium	Leaching from ore-processing sites; Discharge from electronics, glass, and drug factories	ppb	2.0	MCL	17/180	ND - 0.12 (0.10)	5/83	ND - 0.077 (0.07)	3/82	ND - 0.22 (0.12)					
Volatile Organic Compoun	ds (VOCs)														
Total trihalomethanes (sum of chloroform, bromoform, bromodichloromethane, and di- bromochloromethane)	By-product of drinking water disinfection	ppb	80	MCL	-	-	9/83	ND - 2.4 (1.2)	17/82	ND - 4.5 (1.3)	These samples will be collected 3 months after the health advisory was amended. Results will	These samples will be collected 9 months after the health advisory was amended. Results will	These samples will be collected 15 months after the health advisory was amended. Results	These samples will be collected 21 months after the health advisory was amended. Results	These samples will be collected 24 months after the health advisor was amended. Results
trans-1,2-Dichloroethene	Discharge from industrial chemical factories	ppb	100	MCL	2/180	ND - 0.54 (0.41)	0/83	-	0/82	-	be reported in a LTM Month 3 Sampling	be reported in a LTM Month 9 Sampling	will be reported in a LTM Month 15 Sampling Results	will be reported in a LTM Month 21 Sampling Results	will be reported in a LTM Month 24 Sampling Results
Trichloroethene (TCE)	Discharge from metal degreasing sites and other factories	ppb	5.0	MCL	1/180	ND - 0.060 (0.060)	0/83	-	0/82	-	Results Report.	Results Report.	Report.	Report.	Report.
Synthetic Organic Compo	unds (SOCs) or Semi-Volatile Orga	nic Com	npounds (SVC	OCs)											
Benzo(a)pyrene	Leaching from linings of water storage tanks and distribution lines	ppb	0.20	MCL	0/180	-	1/83	ND - 0.038 (0.038)	1/82	ND - 0.031 (0.031)	These samples will be collected 3 months after the health advisory was amended. Results will	These samples will be collected 9 months after the health advisory was amended. Results will	These samples will be collected 15 months after the health advisory was amended. Results	These samples will be collected 21 months after the health advisory was amended. Results	These samples will be collected 24 months after the health advisory was amended. Results
Bis(2-ethylhexyl)phthalate	Discharge from rubber and chemical factories	ppb	6.0	MCL	1/180	ND - 1.9 (1.9)	1/83	ND - 1.4 (1.4)	1/82	ND - 0.41 (0.41)	be reported in a LTM Month 3 Sampling Results Report.	be reported in a LTM Month 9 Sampling Results Report.	will be reported in a LTM Month 15 Sampling Results Report.	will be reported in a LTM Month 21 Sampling Results Report.	will be reported in a LTM Month 24 Sampling Results Report.

- 1. These contaminants are listed whether detected or non-detect (ND) because these are incident specific. All other contaminants are only listed if detected.
- 2. The DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs), previously established environmental action levels (EALs) and incident specific parameters (ISPs).
- 3. These numbers are the minimum and maximum values from all the sample test results with a detectable contaminant. An average is the sum of the results (excluding non-detects) divided by the total number results with detection only. Acronyms and explanation of terms used in this table are presented on the following pages.
- 4. For more information regarding Total Petroleum Hydrocarbons, refer to the FACT SHEET What Are Petroleum Hydrocarbons?, available online at: https://health.hawaii.gov/about/files/2021/12/21.12.16 What-Are-Petroleum-Hydrocarbons, pefer to the FACT SHEET What Are Petroleum Hydrocarbons?, available online at: https://health.hawaii.gov/about/files/2021/12/21.12.16 What-Are-Petroleum-Hydrocarbons pefer to the FACT SHEET What Are Petroleum Hydrocarbons?
- 5. Total Organic Carbon (TOC) test results report any constituent containing carbon, many of which are naturally occurring and some of which are naturally occurring and some of which may be man-made. The DOH selected a TOC project screening level of 2,000 ppb under Stage 4. Each exceedance was investigated by reviewing the associated water quality data (e.g., BTEX results, TPH) and the IDWST determined that all TOC exceedances were inconclusive in association with petroleum hydrocarbons. Under the Drinking Water Long Term Monitoring Plan (under review during the LTM Month 2 report for Zone A3). DOH revised the TOC screening level to 4,000 ppb (previously 2,000 ppb).
- 6. Parts per billion (ppb) refers to the amount (or concentration) of a contaminant in the water.
- 7. Cells highlighted in green indicate the water sample results were below DOH Screening Levels.
- 8. On January 30 and February 25, 2022, DOH revised the LTM requirements to include the analysis of free chlorine. Chlorine is typically used as an additive to drinking water for disinfection purposes.





Table 1-2. Contaminants Detected in Drinking Water Samples Collected from Schools in Zone A3

Table 1-2. Colita	minants Detected in Drinki	lig vvai						5 LTM	Stage	5 LTM	Stage 5 LTM	Stage 5 LTM	Stage 5 LTM	Sta	ie 5 LTM	Stage	e 5 LTM
						l Sampling mmary	Sampling	g Summary nth 1	Sampling	Summary nth 2	Sampling Summary Month 3	Sampling Summary Month 9	Sampling Summar Month 15	y Sampli	ng Summary onth 21	Sampling	g Summary nth 24
					01/31/22	2 – 02/04/22	04/	05/22	04/27/22	- 04/29/22	June 2022	December 2022	June 2023	Dece	mber 2023	Marc	h 2024
Contaminant	Typical Source of Contaminant	Units	DOH Project Screening Level	Basis of DOH Screening Level ²	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects – out of Maximum Samples (Average) ³	No. of Detects - out of Maximum Samples (Average) ³	No. of Detects – out of Samples (Average	Detects m out of	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³
Contaminants of Conce		l	1									T	T			1	
Benzene	Discharge from factories; Leaching from gas storage tanks and landfills	ppb ⁶	5.0	MCL	0/12	-	0/11	-	0/10	-							
Ethylbenzene	Discharge from petroleum refineries	ppb	700	MCL	0/12	-	0/11	-	0/10	-							
Toluene	Discharge from petroleum factories	ppb	1,000	MCL	0/12	-	0/11	-	0/10	-							
Xylenes (total)	Discharge from petroleum factories; Discharge from chemical factories	ppb	10,000	MCL	0/12	-	0/11	-	0/10	-							
1-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also, present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites.	ppb	10	EAL	0/12	-	0/11	-	0/10	-	These samples will be	These samples will be	These samples will t	.e These s	amples will be	These sar	mples will be
2-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also used to make vitamin K; and is present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	EAL	0/12	-	0/11	-	0/10	-	collected 3 months after the health advisory was amended. Results will be reported in a LTM	collected 9 months after the health advisory was amended. Results will be reported in a LTM	collected 15 month after the health advisory was amended. Results w be reported in a LTI	collecte after adv ill amende d be repo	d 21 months the health sory was d. Results will ted in a LTM	collected after th advis amended. be reporte	24 months ne health ory was . Results will ed in a LTM
Naphthalene	Naphthalene is found in coal tar or crude oil and is used in the manufacture of plastics, resins, fuels, and dyes, and as a fumigant	ppb	17	EAL	0/12	-	0/11	-	0/10	-	Month 3 Sampling Results Report.	Month 9 Sampling Results Report.	Month 15 Sampling Results Report.		21 Sampling Its Report.		4 Sampling s Report.
Total TPH ⁴	TPH is petroleum and can contaminate drinking water through spills and other releases into the environment	ppb	211	ISP	0/12	-	1/11	ND - 54 (54)	0/10	-							
Total Organic Carbon (TOC) ⁵	Naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources	ppb	4,000	ISP	8/13	ND – 11,600 (3,403)	0/11	-	0/10	-							
Free Chlorine (Field Test) ⁸	Water additive used to control microbes	ppb	4,000	ISP			11/11	20 – 570 (353)	10/10	10 - 720 (340)							
Metals																	
Antimony	Discharge from petroleum refineries; fire retardants; ceramics; electronics; solder	ppb	6	MCL	0/12	-	0/11	-	1/10	ND - 0.15 (0.15)							
Barium	Discharge of drilling wastes; Discharge from metal refineries; Erosion of natural deposits	ppb	2,000	MCL	12/12	1.9 - 2.2 (2.0)	11/11	1.9 - 2.1 (2.0)	10/10	2.0 - 2.1 (2.1)							
Chromium	Discharge from steel and pulp mills; Erosion of natural deposits	ppb	100	MCL	12/12	1.1 - 1.5 (1.3)	11/11	1.7 - 1.9 (1.8)	10/10	0.80 - 1.3 (1.1)	These samples will be collected 3 months after the health	These samples will be collected 9 months after the health	These samples will to collected 15 months after the health	collecte	amples will be d 21 months the health	collected	mples will be 24 months ne health
Copper	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	1,300	MCL	12/12	10 - 182 (82)	11/11	17 - 180 (70)	10/10	7.5 - 147 (61)	advisory was amended. Results will	advisory was amended. Results will	advisory was amended. Results w	adv ill amende	sory was d. Results will	advis amended.	ory was . Results will
Lead	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	15	MCL	12/12	0.13 - 8.4 (1.3)	9/11	ND - 0.27 (0.2)	8/10	ND - 1.8 (0.44)	be reported in a LTM Month 3 Sampling Results Report.	be reported in a LTM Month 9 Sampling Results Report.	be reported in a LTI Month 15 Sampling Results Report.	Month	ted in a LTM 21 Sampling Its Report.	Month 24	ed in a LTM 4 Sampling s Report.
Mercury	Erosion of natural deposits; Discharge from refineries and factories; Runoff from landfills; Runoff from cropland	ppb	2	MCL	0/12	-	0/11	-	2/10	ND - 0.044 (0.035)	resulte report.	resource report.	. toodio report	11030	горога	rosult	- Nopoli.
Selenium	Discharge from petroleum and metal refineries; Erosion of natural deposits; Discharge from mines	ppb	50	MCL	0/12	-	0/11	-	6/10	ND - 0.83 (0.65)							





Volatile Organic Comp	ounds (VOCs)														
Total Haloacetic acids (sum of mono-, di-, trichloroacetic acids and mono- and dibromo acetic acids)	By-product of drinking water disinfection	ppb	60	MCL	1	-	1/11	ND - 2.4 (2.4)	1/10	ND - 2.5 (2.5)	These samples will be collected 3 months after the health advisory was amended. Results will	These samples will be collected 9 months after the health advisory was	These samples will be collected 15 months after the health advisory was	These samples will be collected 21 months after the health advisory was	These samples will be collected 24 months after the health advisory was
Total trihalomethanes (sum of chloroform, bromoform, bromodichloromethane, and di- bromochloromethane)	By-product of drinking water disinfection	ppb	80	MCL	1	-	5/11	ND - 3.5 (1.8)	2/10	ND - 1.0 (0.96)	be reported in a LTM Month 3 Sampling Results Report.	amended. Results will be reported in a LTM Month 9 Sampling Results Report.	amended. Results will be reported in a LTM Month 15 Sampling Results Report.	amended. Results will be reported in a LTM Month 21 Sampling Results Report.	amended. Results will be reported in a LTM Month 24 Sampling Results Report.
Synthetic Organic Com	pounds (SOCs) or Semi-Volatile Organic	Compound	ls (SVOCs)												
Benzo(a)pyrene	Leaching from linings of water storage tanks and distribution lines	ppb	0.20	MCL	0/12	-	2/11	ND - 0.016 (0.015)	0/10	-	These samples will be collected 3 months after the health advisory was amended. Results will be reported in a LTM Month 3 Sampling Results Report.	These samples will be collected 9 months after the health advisory was amended. Results will be reported in a LTM Month 9 Sampling Results Report.	These samples will be collected 15 months after the health advisory was amended. Results will be reported in a LTM Month 15 Sampling Results Report.	These samples will be collected 21 months after the health advisory was amended. Results will be reported in a LTM Month 21 Sampling Results Report.	These samples will be collected 24 months after the health advisory was amended. Results will be reported in a LTM Month 24 Sampling Results Report.

Notoo

- 1. These contaminants are listed whether detected or non-detect (ND) because these are incident specific. All other contaminants are only listed if detected.
- 2. The DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs), previously established environmental action levels (EALs) and incident specific parameters (ISPs).
- 3. These numbers are the minimum and maximum values from all the sample test results. The average (or mathematical mean) includes all sample test results (excluding non-detects) divided by the total number results with detection only. Acronyms and explanation of terms used in this table are presented on the following pages.
- 4. For more information regarding Total Petroleum Hydrocarbons, refer to the FACT SHEET What Are Petroleum Hydrocarbons?, available online at: https://health.hawaii.gov/about/files/2021/12/21.12.16 What-Are-Petroleum-Hydrocarbons.pdf.
- 5. Total Organic Carbon (TOC) test results report any constituent containing carbon, many of which are naturally occurring and some of which may be man-made. The DOH selected a TOC project screening level of 2,000 ppb under Stage 4. Each exceedance was investigated by reviewing the associated water quality data (e.g., BTEX results, TPH) and the IDWST determined that all TOC exceedances were inconclusive in association with petroleum hydrocarbons. Under the Drinking Water Long Term Monitoring Plan (under review during the LTM Month 2 report for Zone A3). DOH revised the TOC screening level to 4,000 ppb (previously 2,000 ppb).
- 6. Parts per billion (ppb) refers to the amount (or concentration) of a contaminant in the water.
- 7. Cells highlighted in green indicate the water sample results were below DOH Screening Levels.
- 8. On January 30 and February 25, 2022, DOH revised the LTM requirements to include the analysis of free chlorine. Chlorine is typically used as an additive to drinking water for disinfection purposes.





Table 1-3. Contaminants Detected in Drinking Water Samples Collected from Child Development Centers in Zone A3

There are no Child Development Centers in this zone.





Table 1-4. Contaminants Detected in Drinking Water Samples Collected from Other Buildings in Zone A3

	inants Detected in Drinki		,		Stage -	4 Sampling mmary	Stage Sampling	e 5 LTM g Summary onth 1	Stage Sampling	e 5 LTM g Summary nth 2	Stage 5 LTI Sampling Sum Month 3	ımary	Stage 5 LTN Sampling Sumr Month 9		Sampling	5 LTM Summary th 15	Sampling	5 LTM Summary oth 21	Sampling	e 5 LTM g Summary nth 24
					02	2/05/22	04/04/22	2 – 04/05/22	04/	26/22	June 2022	2	December 20	22	June	2023	Decem	ber 2023	Marc	h 2024
Contaminant	Typical Source of Contaminant	Units	DOH Project Screening Level	Basis of DOH Screening Level ²	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum — Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³	Detects out of Max	nimum – kimum erage) ³	No. of Detects out of Samples (Aver	· [mum	No. of Detects out of samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³
Contaminants of Concern	1																			
Benzene	Discharge from factories; Leaching from gas storage tanks and landfills	ppb ⁶	5.0	MCL	0/1	-	0/2	-	0/2	-										
Ethylbenzene	Discharge from petroleum refineries	ppb	700	MCL	0/1	-	0/2	-	0/2	-										
Toluene	Discharge from petroleum factories	ppb	1,000	MCL	0/1	-	0/2	-	0/2	-										
Xylenes (total)	Discharge from petroleum factories; Discharge from chemical factories	ppb	10,000	MCL	0/1	-	0/2	-	0/2	-										
1-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also, present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites.	ppb	10	EAL	0/1	-	0/2	-	0/2	-	These samples	will be	These samples w	ill be 1	Γhese sam	iples will be	These san	nples will be	These sar	mples will be
2-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also used to make vitamin K; and is present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	EAL	0/1	-	0/2	-	0/2	-	collected 3 mo after the hea advisory wa amended. Resul be reported in a Month 3 Samp	alth as alts will a LTM pling	collected 9 mor after the healt advisory was amended. Result be reported in a Month 9 Sampl	h s will a _TM ng	after th advisc amended. be reporte Month 15	ory was Results will ed in a LTM Sampling	after th adviso amended. be reporte Month 21	21 months the health t	after th advis amended. be reporte Month 24	24 months ne health ory was Results will ed in a LTM 4 Sampling
Naphthalene	Naphthalene is found in coal tar or crude oil and is used in the manufacture of plastics, resins, fuels, and dyes, and as a fumigant	ppb	17	EAL	0/1	-	0/2	-	0/2	-	Results Repo	ort.	Results Repo	l.	Results	Report.	Result	s Report.	Result	s Report.
Total TPH ⁴	TPH is petroleum and can contaminate drinking water through spills and other releases into the environment	ppb	211	ISP	0/1	-	1/2	ND - 53 (53)	0/2	-										
Total Organic Carbon (TOC)⁵	Naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources	ppb	4,000	ISP	0/1	-	0/2	-	0/2	-										
Free Chlorine (Field Test) ⁸	Water additive used to control microbes	ppb	4,000	ISP			2/2	30 - 410 (220)	2/2	100 - 360 (230)										
Metals																				
Barium	Discharge of drilling wastes; Discharge from metal refineries; Erosion of natural deposits	ppb	2,000	MCL	1/1	2.1 - 2.1 (2.1)	2/2	1.9 - 3.2 (2.6)	2/2	2.0 - 3.3 (2.7)	Those committee	- ط النيد	Those garanta	ill bo	Theorem	union will be	Thorne	anlag will be	Thosas	mples will be
Chromium	Discharge from steel and pulp mills; Erosion of natural deposits	ppb	100	MCL	1/1	1.6 - 1.6 (1.6)	2/2	1.4 - 1.9 (1.7)	2/2	0.71 - 0.71 (0.71)	These samples of collected 3 mo after the hear	onths alth	These samples w collected 9 mor after the healt	ths h	collected after th	ples will be 15 months e health	collected after th	nples will be 21 months be health	collected after th	nples will be 24 months ne health
Copper	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	1,300	MCL	1/1	35 - 35 (35)	2/2	51 - 58 (54.5)	2/2	69 - 101 (85)	advisory wa amended. Resul be reported in a Month 3 Samp	ılts will a LTM pling	advisory was amended. Result be reported in a Month 9 Sampl	s will a _TM ng	amended. be reporte Month 15	ory was Results will ed in a LTM Sampling	amended. be reporte Month 21	ory was Results will ed in a LTM Sampling	amended. be reporte Month 24	ory was Results will ed in a LTM 4 Sampling
Lead	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	15	MCL	1/1	0.26 - 0.26 (0.26)	1/2	ND - 0.21 (0.21)	1/2	ND - 0.36 (0.36)	Results Repo		Results Repo			Report.		s Report.		s Report.





Selenium	Discharge from petroleum and metal refineries; Erosion of natural deposits; Discharge from mines	ppb	50	MCL	0/1	-	0/2	-	1/2	ND - 0.35 (0.35)					
Volatile Organic Compoun	ds (VOCs)														
Total Haloacetic acids (sum of mono-, di-, trichloroacetic acids and mono- and dibromo acetic acids)	By-product of drinking water disinfection	ppb	60	MCL	-	1	0/2	-	1/2	ND - 1.1 (1.1)	These samples will be collected 3 months after the health	These samples will be collected 9 months after the health	These samples will be collected 15 months after the health	These samples will be collected 21 months after the health	These samples will be collected 24 months after the health
Total trihalomethanes (sum of chloroform, bromoform, bromodichloromethane, and di- bromochloromethane)	By-product of drinking water disinfection	ppb	80	MCL	-		1/2	ND - 0.78 (0.78)	2/2	0.59 - 8.5 (4.5)	advisory was amended. Results will be reported in a LTM Month 3 Sampling Results Report.	advisory was amended. Results will be reported in a LTM Month 9 Sampling Results Report.	advisory was amended. Results will be reported in a LTM Month 15 Sampling Results Report.	advisory was amended. Results will be reported in a LTM Month 21 Sampling Results Report.	advisory was amended. Results will be reported in a LTM Month 24 Sampling Results Report.

Synthetic Organic Compounds (SOCs) or Semi-Volatile Organic Compounds (SVOCs) - ND

Notes

- 1. These contaminants are listed whether detected or non-detect (ND) because these are incident specific. All other contaminants are only listed if detected.
- 2. The DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs), previously established environmental action levels (EALs) and incident specific parameters (ISPs).
- 3. These numbers are the minimum and maximum values from all the sample test results. The average (or mathematical mean) includes all sample test results with a detectable contaminant. An average is the sum of the results (excluding non-detects) divided by the total number results with detection only. Acronyms and explanation of terms used in this table are presented on the following pages.
- 4. For more information regarding Total Petroleum Hydrocarbons, refer to the FACT SHEET What Are Petroleum Hydrocarbons?, available online at: https://health.hawaii.gov/about/files/2021/12/21.12.16 What-Are-Petroleum-Hydrocarbons, pdf.
- 5. Total Organic Carbon (TOC) test results report any constituent containing carbon, many of which are naturally occurring and some of which may be man-made. The DOH selected a TOC project screening level of 2,000 ppb under Stage 4. Each exceedance was investigated by reviewing the associated water quality data (e.g., BTEX results, TPH) and the IDWST determined that all TOC exceedances were inconclusive in association with petroleum hydrocarbons. Under the Drinking Water Long Term Monitoring Plan (under review during the LTM Month 2 report for Zone A3). DOH revised the TOC screening level to 4,000 ppb (previously 2,000 ppb).
- 6. Parts per billion (ppb) refers to the amount (or concentration) of a contaminant in the water.
- 7. Cells highlighted in green indicate the water sample results were below DOH Screening Levels.
- 8. On January 30 and February 25, 2022, DOH revised the LTM requirements to include the analysis of free chlorine. Chlorine is typically used as an additive to drinking water for disinfection purposes.





Table 1-5. Contam	inants Detected in Drinking	y Wate	r Sample	s Collecte	ed from	Fire Hydr	ants in 2	Zone A3												
					_	Sampling nmary	Sampling	e 5 LTM g Summary nth 1	Sampling	5 LTM Summary nth 2	Sampling	5 LTM g Summary nth 3	Samplin	e 5 LTM g Summary onth 9	Sampling	5 LTM Summary 1th 15	Sampling	5 LTM Summary th 21	Sampling	5 LTM Summary oth 24
					01/01/22	- 01/13/22	04/	04/22	04/2	25/22	June	e 2022	Decem	ber 2022	June	2023	Decemb	per 2023	Marc	h 2024
Contaminant	Typical Source of Contaminant	Units	DOH Project Screening Level	Basis of DOH Screening Level ²	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³	No. of Detects out of Samples	Minimum – Maximum (Average) ³
Contaminants of Concern	. ,,				ı	ı								<u> </u>			L			
Benzene	Discharge from factories; Leaching from gas storage tanks and landfills	ppb ⁶	5.0	MCL	0/8	-	0/8	-	0/10	-										
Ethylbenzene	Discharge from petroleum refineries	ppb	700	MCL	0/8	-	0/8	-	0/10	-										
Toluene	Discharge from petroleum factories	ppb	1,000	MCL	0/8	-	0/8	-	0/10	-										
Xylenes (total)	Discharge from petroleum factories; Discharge from chemical factories	ppb	10,000	MCL	0/8	-	0/8	1	0/10	-										
1-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also, present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites.	ppb	10	EAL	0/8		0/8	-	0/10		These sam	nples will be	These sa	mples will be	These san	nples will be	These sam	nples will be	These san	nples will be
2-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also used to make vitamin K; and is present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	EAL	0/8		0/8	-	0/10	-	collected after th adviso amended. be reporte	d 3 months ne health ory was Results will ed in a LTM Sampling	collected after the advis amended be report	d 9 months he health ory was . Results will ed in a LTM 9 Sampling	collected after th adviso amended. be reporte	15 months he health bry was Results will ed in a LTM 5 Sampling	collected : after the adviso amended. be reporte	21 months e health ory was Results will	collected after th adviso amended. be reporte	24 months le health ory was Results will led in a LTM I Sampling
Naphthalene	Naphthalene is found in coal tar or crude oil and is used in the manufacture of plastics, resins, fuels, and dyes, and as a fumigant	ppb	17	EAL	0/11	-	0/8	-	0/10	-		s Report.		s Report.		s Report.	Results			s Report.
Total TPH⁴	TPH is petroleum and can contaminate drinking water through spills and other releases into the environment	ppb	211	ISP	1/9	ND - 48 (48)	0/8	-	1/10	ND - 59 (59)										
Total Organic Carbon (TOC) ⁵	Naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources	ppb	4,000	ISP	2/8	ND - 842 (820)	0/8	1	1/10	ND - 390 (390)										
Free Chlorine (Field Test) ⁹	Water additive used to control microbes	ppb	4,000	ISP			8/8	120 - 700 (444)	8/8	40 - 510 (274)										
Metals																				
Antimony	Discharge from petroleum refineries; fire retardants; ceramics; electronics; solder	ppb	6	MCL	0/8	-	0/8	-	1/10	ND - 0.13 (0.13)										
Arsenic	Erosion of natural deposits; Runoff from orchards; Runoff from glass and electronics production wastes	ppb	10	MCL	8/8	0.13 - 0.74 (0.42)	1/8	ND - 0.65 (0.65)	0/10	-	collected	mples will be	collecte	mples will be d 9 months	collected	nples will be 15 months	collected		collected	nples will be 24 months
Barium	Discharge of drilling wastes; Discharge from metal refineries; Erosion of natural deposits	ppb	2,000	MCL	8/8	1.9 - 74 (20)	8/8	2.0 - 2.6 (2.2)	10/10	1.9 - 5.9 (2.4)	adviso amended. be reporte	ne health ory was Results will ed in a LTM Sampling	advis amended be report	he health fory was . Results will ed in a LTM) Sampling	adviso amended. be reporte	ne health ory was Results will ed in a LTM ory Sampling	adviso amended. be reporte	e health ory was Results will d in a LTM Sampling	adviso amended. be reporte	ne health ory was Results will ed in a LTM Sampling
Chromium	Discharge from steel and pulp mills; Erosion of natural deposits	ppb	100	MCL	8/8	1.0 - 1.5 (1.3)	8/8	1.2 - 1.3 (1.3)	10/10	1.1 - 1.2 (1.1)		s Report.		s Report.		s Report.	Results			s Report.
Copper	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	1,300	MCL	8/8	0.86 - 50 (7.6)	8/8	3.1 - 11 (4.9)	10/10	1.1 - 5.3 (2.4)										





Lead	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	15	MCL	8/8	0.12 - 7.6 (1.1)	7/8	ND - 0.51 (0.29)	6/10	ND - 0.31 (0.24)	These samples will be collected 3 months	These samples will be collected 9 months	These samples will be collected 15 months	These samples will be collected 21 months	These samples will be collected 24 months
Selenium	Discharge from petroleum and metal refineries; Erosion of natural deposits; Discharge from mines	ppb	50	MCL	7/8	ND - 4.1 (2.3)	0/8		10/10	0.52 - 1.2 (0.73)	after the health advisory was amended. Results will	after the health advisory was amended. Results will	after the health advisory was amended. Results will	after the health advisory was amended. Results will	after the health advisory was amended. Results will
Thallium	Leaching from ore-processing sites; Discharge from electronics, glass, and drug factories	ppb	2.0	MCL	0/8	-	1/8	ND - 0.056 (0.056)	1/10	ND - 0.055 (0.055)	be reported in a LTM Month 3 Sampling Results Report.	be reported in a LTM Month 9 Sampling Results Report.	be reported in a LTM Month 15 Sampling Results Report.	be reported in a LTM Month 21 Sampling Results Report.	be reported in a LTM Month 24 Sampling Results Report.
Volatile Organic Compou	nds (VOCs) - ND														
Total trihalomethanes (sum of chloroform, bromoform, bromodichloromethane, and di- bromochloromethane)	By-product of drinking water disinfection	ppb	80	MCL	-	-	0/8	-	3/10	ND - 63 (22)	These samples will be collected 3 months after the health advisory was amended. Results will be reported in a LTM Month 3 Sampling Results Report.	These samples will be collected 9 months after the health advisory was amended. Results will be reported in a LTM Month 9 Sampling Results Report.	These samples will be collected 15 months after the health advisory was amended. Results will be reported in a LTM Month 15 Sampling Results Report.	These samples will be collected 21 months after the health advisory was amended. Results will be reported in a LTM Month 21 Sampling Results Report.	These samples will be collected 24 months after the health advisory was amended. Results will be reported in a LTM Month 24 Sampling Results Report.
Synthetic Organic Compo	ounds (SOCs) or Semi-Volatile Organic C	ompound	s (SVOCs)												
2-Methylphenol (o-Cresol)	Used to make other chemicals such as dyes, resins, and textiles; Used in the manufacturing of pesticides	ppb	_7	_7	1/2	ND - 0.062 (0.062)	0/8	-	0/10	-	These samples will be collected 3 months after the health	These samples will be collected 9 months after the health	These samples will be collected 15 months after the health	These samples will be collected 21 months after the health	These samples will be collected 24 months after the health
Benzo(a)pyrene	Leaching from linings of water storage tanks and distribution lines	ppb	0.20	MCL	0/11	-	1/8	ND - 0.021 (0.021)	0/10	-	advisory was amended. Results will be reported in a LTM	advisory was amended. Results will be reported in a LTM	advisory was amended. Results will be reported in a LTM	advisory was amended. Results will be reported in a LTM	advisory was amended. Results will be reported in a LTM
Di-n-butyl phthalate	Discharge from chemical factories; Used in the manufacturing of plastics.	ppb	_7	_7	3/3	0.34 - 0.45 (0.38)	0/8	-	0/10	-	Month 3 Sampling Results Report.	Month 9 Sampling Results Report.	Month 15 Sampling Results Report.	Month 21 Sampling Results Report.	Month 24 Sampling Results Report.

Notes

- 1. These contaminants are listed whether detected or non-detect (ND) because these are incident specific. All other contaminants are only listed if detected.
- 2. The DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs), previously established environmental action levels (EALs) and incident specific parameters (ISPs).
- 3. These numbers are the minimum and maximum values from all the sample test results. The average (or mathematical mean) includes all sample test results with a detectable contaminant. An average is the sum of the results (excluding non-detects) divided by the total number results with detection only. Acronyms and explanation of terms used in this table are presented on the following pages.
- 4. For more information regarding Total Petroleum Hydrocarbons, refer to the FACT SHEET What Are Petroleum Hydrocarbons?, available online at: https://health.hawaii.gov/about/files/2021/12/21.12.16 What-Are-Petroleum-Hydrocarbons.pdf.
- 5. Total Organic Carbon (TOC) test results report any constituent containing carbon, many of which are naturally occurring and some of which may be man-made. The DOH selected a TOC project screening level of 2,000 ppb under Stage 4. Each exceedance was investigated by reviewing the associated water quality data (e.g., BTEX results, TPH) and the IDWST determined that all TOC exceedances were inconclusive in association with petroleum hydrocarbons. Under the Drinking Water Long Term Monitoring Plan (under review during the LTM Month 2 report for Zone A3). DOH revised the TOC screening level to 4,000 ppb (previously 2,000 ppb).
- 6. Parts per billion (ppb) refers to the amount (or concentration) of a contaminant in the water.
- 7. This contaminant does not have a DOH Screening Level and was only detected at low concentrations. It is not associated with fuels and is not considered a risk to human health associated with the fuel release that occurred at Red Hill in November 2021.
- 8. Cells highlighted in green indicate the water sample results were below DOH Screening Levels.
- 9. On January 30 and February 25, 2022, DOH revised the LTM requirements to include the analysis of free chlorine. Chlorine is typically used as an additive to drinking water for disinfection purposes.





Table 1-6. Contaminants Detected in Drinking Water Samples Collected from JBPHH's Source Water (Waiawa Shaft – Post Chlorination)

Chlorination)			1		1			
Contaminant	Sampling Period	Units	DOH Project Screening Level	Basis of DOH Screening Level ²	No. of Detects out of No. of Samples	Level Detected	Meets DOH Screening Level? (Yes / No)	Typical Source of Contaminant
Contaminants of Concern ¹								
Benzene	01/11/2022	ppb⁴	5.0	MCL	0/1		Yes	Discharge from factories; Leaching from gas storage tanks and landfills
Ethylbenzene	01/11/2022	ppb	700	MCL	0/1		Yes	Discharge from petroleum refineries
Toluene	01/11/2022	ppb	1,000	MCL	0/1		Yes	Discharge from petroleum factories
Xylenes (total)	01/11/2022	ppb	10,000	MCL	0/1		Yes	Discharge from petroleum factories; Discharge from chemical factories
1-Methylnaphthalene	01/11/2022	ppb	10	ISP	0/1		Yes	Used to make other chemicals such as dyes, and resins; also, present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites
2-Methylnaphthalene	01/11/2022	ppb	10	ISP	0/1		Yes	Used to make other chemicals such as dyes, and resins; also used to make vitamin K; and is present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites
Naphthalene	01/11/2022	ppb	17	ISP	0/1		Yes	Naphthalene is found in coal tar or crude oil and is used in the manufacture of plastics, resins, fuels, and dyes, and as a fumigant
Total Petroleum Hydrocarbons (TPHs)	01/11/2022	ppb	211	ISP	0/1		Yes ³	TPH is petroleum and can contaminate drinking water through spills and other releases into the environment
Total Organic Carbon (TOC)	01/11/2022	ppb	2,000	ISP	0/1		Yes	Naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources
Metals								
Antimony	01/11/2022	ppb	6.0	MCL	1/1	0.092	Yes	Discharge from petroleum refineries; fire retardants; ceramics; electronics; solder
Arsenic	01/11/2022	ppb	10	MCL	1/1	0.027	Yes	Erosion of natural deposits; Runoff from orchards; Runoff from glass and electronics production waste
Barium	01/11/2022	ppb	2,000	MCL	1/1	1.7	Yes	Discharge of drilling wastes; Discharge from metal refineries; Erosion of natural deposits
Chromium	01/11/2022	ppb	100	MCL	1/1	1.5	Yes	Corrosion of galvanized pipes; Erosion of natural deposits; Discharge from metal refineries; Runoff from waste batteries and paints
Copper	01/11/2022	ppb	1,300	EAL	1/1	21	Yes	Corrosion of household plumbing systems; Erosion of natural deposits





Contaminant	Sampling Period	Units	DOH Project Screening Level	Basis of DOH Screening Level ²	No. of Detects out of No. of Samples	Level Detected	Meets DOH Screening Level? (Yes / No)	Typical Source of Contaminant
Lead	01/11/2022	ppb	15	EAL	1/1	0.27	Yes	Corrosion of household plumbing systems; Erosion of natural deposits
Selenium	01/11/2022	ppb	50	MCL	1/1	0.70	Yes	Discharge from petroleum and metal refineries; Erosion of natural deposits; Discharge from mines

Volatile Organic Compounds - ND

Synthetic Organic Compounds (SOCs) or Semi-Volatile Organic Compounds (SVOCs) - ND

Notes:

- 1. These contaminants are listed whether detected or non-detect (ND) because these are incident specific. All other contaminants are only listed if detected.
- 2. The DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs), previously established environmental action levels (EALs) and incident specific parameters (ISPs).
- 3. For more information regarding Total Petroleum Hydrocarbons, refer to the FACT SHEET What Are Petroleum Hydrocarbons?, available online at: https://health.hawaii.gov/about/files/2021/12/21.12.16 What-Are-Petroleum-Hydrocarbons.pdf.
- 4. Parts per billion (ppb) refers to the amount (or concentration) of a contaminant in the water.





<u>Drinking Water Distribution System Recovery Plan:</u> <u>Stage 5 LTM Month 2 Sampling Results Report for Zone A3</u>

What is the purpose of this Stage 5 LTM Month 2 Sampling Results Report?

This progress report presents the testing results from drinking water samples that have been collected from residences, schools, other buildings, and fire hydrants. These samples were collected after the health advisory had been amended and DOH determined drinking water was safe for human consumption. The health advisory was amended after the first four stages of the Drinking Water Distribution System Recovery Plan were completed in your zone. The JBPHH PWS #HI0000360 is committed to ensuring tap water is safe for human consumption after residents have returned home.

We are sharing this information with you to keep you updated on your community's water quality.

What was found?

The tables on the previous pages present all contaminants that were detected in drinking water samples that have been collected from residences, schools, other buildings, and fire hydrants in your zone during Stage 5 LTM Month 1 and LTM Month 2. The DOH used multiple standards/criteria (called DOH Project Screening Levels) to assess the safety of the drinking water to include:

- EPA and Hawaii DOH Maximum Contaminant Levels (MCLs) standards for drinking water;
- Previously established Environmental Action Levels (EALs); and
- Incident Specific Parameters (ISPs).

This report together with the data demonstrates that the drinking water in your area (Zone A3) meets U.S. EPA and DOH standards that are applicable to the Navy Water System Incident.

Total Organic Carbon (TOC) test results report any constituent containing carbon, many of which are naturally occurring and some of which may be man-made. The DOH selected a TOC project screening level of 4,000 parts per billion (ppb) for long term monitoring. Each potential exceedance is investigated by reviewing the associated water quality data (e.g., Disinfection Byproducts and TPH results) for association with petroleum hydrocarbons. No TOC exceedances occurred in LTM Month 1 or LTM Month 2 for Zone A3.





What contaminants were tested?

Drinking water, including bottled water, can contain at least small amounts of some contaminants. The presence of contaminants does not necessarily indicate that water poses a health risk. More information about contaminants tested can be obtained by calling the Hawaii DOH Safe Drinking Water Branch at 808-586-4258.

In order to ensure that drinking water is safe to drink, EPA and Hawaii DOH regulate the amount of certain contaminants in water provided by public water systems. For this incident, the primary categories of monitored contaminants include volatile organic compounds (VOCs), synthetic organic chemicals (SOCs)/semi-volatile organic compounds (SVOCs), metals, Total Petroleum Hydrocarbons (TPH), and Total Organic Carbon (TOC). A description of these contaminant categories can be found under *Explanation of Terms* located at the end of this report. The full list of contaminants that were tested for this zone are presented in the laboratory reports that are located at: https://jbphh-safewaters.org. For complete information on the interagency response, please visit: https://www.cpf.navy.mil/JBPHH-Water-Updates/.

What happened leading up to the public health advisory being issued?

The Red Hill Bulk Fuel Storage Facility jet fuel spill event was reported to have taken place on November 20, 2021. Subsequent reporting of fuel-like smell or visual sheen in addition to complaints of health issues from ingestion or dermal contact with the Navy and Army system water were received by the Navy and DOH. On November 28, 2021, the Navy reported that a chemical release of petroleum, which is a hazardous substance, entered the JBPHH drinking water distribution system from the Red Hill Shaft source. This release triggered an emergency response and DOH issuance of a public health advisory on November 29, 2021, for the entire JBPHH Public Water System No. HI0000360 (JBPHH System) and the consecutive Aliamanu Military Reservation Public Water System No. HI0000337 (AMR System).

The Hawaii DOH, EPA, Navy, and Army formed the Interagency Drinking Water System Team (IDWST) to work on a coordinated effort to restore safe drinking water to all Navy Water System users.

Has the public health advisory been amended or lifted?

The health advisory for Zone A3 was amended on March 13, 2022 but has not been lifted for the entire JBPHH System. The amendment to the health advisory was based on the results of extensive flushing, sampling (10% of buildings), and testing activities performed in Zone A3. The IDWST evaluated multiple lines of evidence to determine whether or not drinking water was safe for consumption. DOH determine that the water in Zone A3 was safe and residents/occupants could use their tap water for all purposes include drinking, cooking, oral hygiene, and consumption by pets. LTM of drinking water will be performed to ensure drinking water remains safe for all residents and occupants





of JBPHH. If new information becomes available that indicates contaminants are present in the drinking water that poses a threat to public health, additional investigation may be required.

Where does our water come from?

The source of water for the Navy Water System now comes from the Navy Waiawa Shaft, which was not impacted by the release of Jet Fuel (JP-5) that occurred at Red Hill in late November 2021. The Waiawa Shaft has been sampled, and EPA and the DOH confirmed that it meets all federal and state drinking water standards. The Waiawa Shaft will be sampled (in subsequent months during LTM) in accordance with EPA and the DOH requirements.

What has the IDWST done to clean the drinking water distribution system?

The IDWST evaluated multiple options for cleaning the Navy drinking water distribution system and determined that high-volume flushing of the Navy drinking water distribution system (all water mains/laterals/buildings) with 3 to 5 volumes of clean water from the Waiawa Shaft, followed by extensive testing to confirm that flushing worked, would restore safe drinking water to all Navy Water System users.

When was Long-Term Monitoring (LTM) water quality sampling conducted in Zone A3?

Between April 4, 2022 and April 7, 2022, drinking water samples were collected from residences, schools, other buildings, and fire hydrants in Zone A3 for LTM Month 1.

Between April 25, 2022 and May 11 2022, drinking water samples were collected from residences, schools, other buildings, and fire hydrants in Zone A3 for LTM Month 2.

Where were samples taken?

Per the IDWST approved sampling plan, five percent (5%) of all homes and buildings within Zone A3 were sampled with a minimum of 5 homes/buildings sampled. There are no Child Development Centers in this zone. These houses/buildings will be geographically distributed throughout the area to provide spatial coverage along the water supply line. In addition, the list of houses/buildings may be augmented based on additional information (e.g., houses/buildings where occupants reported specific health impacts, houses/buildings that are referred to the team by medical providers) may also be sampled.





Where can I get more information about the potential health effects associated with these contaminants?

Hawaii Department of Health (DOH)
https://health.hawaii.gov/about/navy-water-system-quality-updates/.
Call the DOH Safe Drinking Water Branch at 808-586-4258

US Environmental Protection Agency (EPA)

https://www.epa.gov/ground-water-and-drinking-water/forms/online-form-epas-office-ground-water-and-drinking-water

Call EPA Region 9's Environmental Information Center at 1-866-372-9378





Explanation of Terms and Acronyms used in this Report

Action Level (AL). This AL is for Lead and Copper. The AL is a measure of the effectiveness of the corrosion control treatment in water systems. The AL is not a standard for establishing a safe level of lead or copper. The AL is the point at which certain provisions of the proposed standards must be initiated.

Contaminant. Contaminant is any physical, chemical, biological, or radiological substance or matter in water, and can be either healthy or unhealthy, depending on the particular substance and concentration. It could also be a physical parameter monitored such as pH or temperature.

DOH. Hawaii Department of Health

EPA. U.S. Environmental Protection Agency

Incident Specific Parameter (ISP). To more comprehensively monitor and respond to this specific petroleum contamination of drinking water, the DOH identified contaminants that require additional action prior to amending the Health Advisory. The ISPs are used as a line of evidence to evaluate the data generated in each zone during the investigation conducted by the IDWST.

Maximum Contaminant Level (MCL). An MCL is the maximum permissible level of a contaminant in water which is delivered to any user of a public water system. The MCL is set to protect the public from acute and chronic health risks associated with consuming water containing these contaminants.

Metals. Metals are not derived from living sources and in general do not contain carbon. Metals include antimony, arsenic, asbestos, barium, beryllium, cadmium, chromium, copper, cyanide, fluoride, lead, mercury, nitrate, nitrite, selenium, and thallium. These contaminants get into drinking water supplies through industrial discharge or spills, erosion of natural deposits, corrosion, sewage discharge, fertilizer runoff, and other sources.

ND. Non-Detect

Project Specific Screening Level. DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs) previously established environmental action levels (EALs) and incident specific parameters (ISPs).

Synthetic Organic Compounds (SOCs)/Semi-Volatile Organic Compounds (SVOCs). SOCs and SVOCs may be used interchangeably and are man-made, organic (carbon-based) chemicals that are less volatile than Volatile Organic





Contaminants (VOCs). They are used as pesticides, defoliants, fuel additives, and as ingredients for other organic chemicals.

DOH Environmental Action Level (EAL). The DOH Environmental Action Levels (EALs) are concentrations of contaminants in drinking water and other media (e.g., soil, soil gas, and groundwater) below which the contaminants are assumed to not pose a significant threat to human health or the environment. Exceeding these EAL does not necessarily indicate that contamination at the site poses environmental hazards but generally warrants additional investigation.

Total Petroleum Hydrocarbons (TPH). TPH is a term used to describe a large family of several hundred chemical compounds that come from crude oil. Crude oil is used to make petroleum products, which can contaminate the environment. TPH is comprised of detected results from TPH-Gasoline, TPH-Diesel, and TPH-Oil.

Total Organic Carbon (TOC). TOC is naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources.

Free Chlorine. Chlorine is added to drinking water as part of the treatment process. Adding chlorine is the most common way to disinfect drinking water. Disinfection kills bacteria, viruses, and other microorganisms that could cause disease or illness. Chlorine is effective and continues to keep the water safe as it travels from the treatment plant to the consumer's tap. Chlorine measurements provide another line-of-evidence for evaluating drinking water quality.

Total Trihalomethanes (TTHM). TTHM is the sum of the concentration in milligrams per liter of the trihalomethane compounds (trichloromethane [chloroform], dibromochloromethane, bromodichloromethane and tribromomethane [bromoform]).

Units. A unit is the concentration of contaminant found in the water. For this report, the units are expressed in U.S. Standard Units.

U.S. Standard Unit (Name)	Acronym	Equivalent International System of Units (Name)	Acronym
parts per billion	ppb	micrograms per Liter	μg/L

Volatile Organic Compounds (VOCs). VOCs are a class of chemicals that contain carbon and evaporate, or volatilize, easily into air at room temperature. VOCs are found in a variety of commercial, industrial, and residential products, including gasoline, solvents, cleaners and degreasers, paints, inks and dyes, and pesticides.