



Joint Base Pearl Harbor-Hickam (JBPHH) Public Water System No. HI0000360

Drinking Water Distribution System Recovery Plan: Stage 5 Long-Term Monitoring (LTM) Period 4 Sampling Results Report for Zone D1 29 November 2022



Neighborhoods included in Zone D1: Hale Moku and Hokulani






EXECUTIVE SUMMARY FOR ZONE D1

This report documents the results of long-term monitoring (LTM) testing for Zone D1. We are sharing this information with you to keep you updated on your water quality.

This LTM testing was performed after the November 29, 2021 Public Health Advisory for the JBPHH Public Water System¹ for Zone D1 was amended by the Hawaii Department of Health (DOH) on March 1, 2022. The amended health advisory for Zone D1 can be found online at: https://jbphh-safewaters.org. The amended health advisory states that tap water can be used for all purposes including drinking, cooking, oral hygiene, and consumption by pets. The health advisory was amended based on a final review of all sample data and how the Navy water system maintains operations to ensure safe drinking water. Test results that led to the advisory amendment are summarized in the Stage 4 Residential Sampling Report. After the health advisory was amended, residents were informed that they can safely use their water for all purposes.

Zone D1 has been thoroughly flushed, sampled, and tested. This zone has completed each stage (i.e., Stage 1 - Distribution System Flushing through Stage 4 - Building Sampling) outlined in the Drinking Water Distribution System Recovery Plan.² Based on the samples collected and tested from water mains (Stage 2), residences, buildings, schools, and child development centers (Stage 4), this zone meets the U.S. Environmental Protection Agency (EPA) and DOH drinking water standards used during this investigation. Zone D1 is now in the LTM phase (a.k.a., Stage 5), which is described below. For additional information on the Stage 2, Stage 4, and Stage 5 sample results by zone, please visit: https://jbphh-safewaters.org.

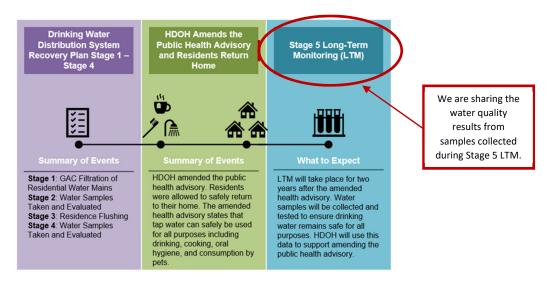

¹ Public Health Advisory for the JBPHH Public Water System: https://health.hawaii.gov/news/files/2021/11/21-165-DOH-advises-Navy-water-system-consumers-not-to-drink-consume-tap-water.pdf

i

² The Drinking Water Distribution System Recovery Plan was developed and approved by the Interagency Drinking Water System Team (IDWST). The DOH, EPA, Navy, and Army formed the IDWST to restore safe drinking water to all Navy Water System users. The JBPHH PWS #HI0000360 will continue the work of the IDWST by working to restore consumer confidence by ensuring tap water continues to be safe for human consumption (e.g., drinking, cooking, and oral hygiene).





Long-Term Monitoring

LTM will be performed as outlined in the Final Drinking Water Sampling and Long-Term Monitoring Plan, dated June 2022. LTM will take place for two years after the date of the amended health advisory. The purpose of LTM is to ensure tap water continues to be safe for human consumption (e.g., drinking, cooking, and oral hygiene). All required samples under the LTM have met the requirements for this Period (Period 4). The results of any additionally requested samples after the completion date (see table below) will be included under the Sampling Results for Zone D1 on the Safe Water website. Residents/occupants will be notified if and when their house/building is scheduled to be sampled. Below is the schedule for LTM in Zone D1.

LTM Schedule for Zone D1

Sampling Event ¹	Summary of Sampling Activities	Completion Date ²
Period 1	5% of houses/buildings (minimum of 5 houses/buildings)	March 15 –
r enou i	570 of flouses/buildings (fillifillifier) of 5 flouses/buildings)	April 1, 2022
Period 2	5% of houses/buildings (minimum of 5 houses/buildings)	April 11 –
r enou z	570 of flouses/buildings (fillifillifier) of 5 flouses/buildings)	April 19, 2022
Period 3	5% of houses/buildings (minimum of 5 houses/buildings)	May 10 –
reliou 3	5 % of flouses/buildings (fillillifield of 5 flouses/buildings)	May 19, 2022
Period 4	10% of houses/buildings	June 23 –
r enou 4	10 % of flouses/buildings	November 4, 2022
Period 5	10% of houses/buildings	June 2023
Period 6	10% of houses/buildings	December 2023
Period 7	10% of houses/buildings	March 2024

Notes:

¹ Sampling events are scheduled based on the amount of time (months) since the DOH health advisory was amended for this zone.

² Completion dates are estimated based on the date the DOH health advisory was amended for this zone.





Tables Included in this Stage 5 Sampling Results Report for Zone D1

Table	Description Page
Table 1-1.	Contaminants Detected in Drinking Water Samples Collected from Residences in Zone D1
Table 1-2.	Contaminants Detected in Drinking Water Samples Collected from Schools in Zone D1
Table 1-3.	Contaminants Detected in Drinking Water Samples Collected from Child Development Centers in Zone D1
Table 1-4.	Contaminants Detected in Drinking Water Samples Collected from Other Buildings in Zone D1
Table 1-5.	Contaminants Detected in Drinking Water Samples Collected from Fire Hydrants in Zone D1
Table 1-6.	Contaminants Detected in Drinking Water Samples Collected from JBPHH's Source Water (Waiawa Shaft - Post Chlorination)





Table 1-1. Contaminants Detected in Drinking Water Samples Collected from Residences in Zone D1

Table 1-1. Contan	ninants Detected in Drin	iking \	Nater Sa	mples Co	ollected f	rom Resi	dences	in Zone D)1		ı		1		T		ı			
						Sampling Imary		M Sampling y Period 1		M Sampling y Period 2		M Sampling y Period 3		ΓM Sampling ry Period 4	Stage 5 LTI Summary			M Sampling Period 6		ΓM Sampling ry Period 7
			DOH	Basis of	Februa	ary 2022	Apri	il 2022	Мау	2022	June	2022	Decem	ber 2022	June	2023	Decem	per 2023	Marc	ch 2024
Contaminant	Typical Source of Contaminant	Units	Project Screening Level	DOH Screening Level ²	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³
Contaminants of Concern	n ¹																			
Benzene	Discharge from factories; Leaching from gas storage tanks and landfills	ppb ⁶	5.0	MCL	0/62	-	0/31	-	0/29	-	0/27	-	0/54	-						
Ethylbenzene	Discharge from petroleum refineries	ppb	700	MCL	0/62	-	0/31	-	0/29	-	0/27	-	0/54	-						
Toluene	Discharge from petroleum factories	ppb	1,000	MCL	0/62	-	0/31	-	0/29	-	0/27	-	0/54	-						
Xylenes (total)	Discharge from petroleum factories; Discharge from chemical factories	ppb	10,000	MCL	0/54	-	0/31	-	0/29	-	0/27	-	0/54	-						
1-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also, present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites.	ppb	10	EAL	0/62	-	0/31	-	0/29	-	0/27	-	0/54	-						
2-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also used to make vitamin K; and is present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	EAL	0/62	-	0/31	-	0/29	-	0/27	-	0/54	-	will be report	.15 months alth advisory ed. Results ted in a LTM Sampling	collected after the he was amend will be report Period 6	ples will be 21 months alth advisory led. Results ted in a LTM Sampling Report.	collected after the he was amen will be re LTM Period	mples will be I 24 months ealth advisory ided. Results eported in a d 7 Sampling is Report.
Naphthalene	Naphthalene is found in coal tar or crude oil and is used in the manufacture of plastics, resins, fuels, and dyes, and as a fumigant	ppb	17	EAL	0/62	-	0/31	-	0/29	-	0/27	-	0/54	-	was amended will be reported Period 5 Sa Results R		Nesuits	Кер от.	Nesulis	s Nepolt.
Total TPH⁴	TPH is petroleum and can contaminate drinking water through spills and other releases into the environment	ppb	266 ⁹	ISP	1/62	ND - 192 (192)	18/31	ND - 158 (69)	6/29	ND - 80 (59)	6/27	ND - 92 (67)	21/55	ND - 84 (64)						
Total Organic Carbon (TOC) ⁵	Naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources	ppb	4,000	ISP	5/62	ND - 14,500 (4,670)	7/31	ND - 550 (441)	0/29	-	1/27	ND - 870 (870)	0/54	-						
Free Chlorine (Field Test) ⁸	Water additive used to control microbes	ppb	4,000	MCL	-	-	24/27	ND - 630 (337)	26/26	20 - 660 (388)	26/26	20 - 890 (339)	47/47	60 - 770 (430)						
Metals		,																		
Antimony	Discharge from petroleum refineries; fire retardants; ceramics; electronics; solder	ppb	6.0	MCL	0/62	-	0/31	-	3/29	ND - 4.6 (1.6)	2/27	ND - 0.13 (0.12)	1/54	ND - 0.56 (0.56)	These sam collected after the hear	15 months alth advisory	collected after the he	ples will be 21 months alth advisory	collected after the he	mples will be I 24 months ealth advisory
Arsenic	Erosion of natural deposits; Runoff from orchards; Runoff from glass and electronics production wastes	ppb	10	MCL	5/62	ND - 0.91 (0.76)	0/31	-	3/29	ND - 2.6 (1.3)	0/27	-	3/54	ND - 0.8 (0.73)	was amend will be repor Period 5 Results	ted in a LTM Sampling	will be repor	led. Results ted in a LTM Sampling Report.	will be re LTM Period	nded. Results eported in a d 7 Sampling as Report.
Barium	Discharge of drilling wastes; Discharge from metal refineries; Erosion of natural deposits	ppb	2,000	MCL	62/62	1.7 - 3.5 (2.0)	30/31	ND - 3.7 (2.0)	28/29	ND - 3.9 (2.1)	27/27	1.8 - 3.6 (2.0)	54/54	1.8 - 2.3 (1.9)	These sam collected after the hea	15 months	collected	ples will be 21 months alth advisory	collected	mples will be I 24 months ealth advisory

1





Cadmium	By-product of drinking water disinfection	ppb	5.0	MCL	0/62	-	1/31	ND - 0.069 (0.069)	0/29	-	3/27	ND - 0.13 (0.11)	0/54	-	was amended. Results will be reported in a LTM Period 5 Sampling	was amended. Results will be reported in a LTM Period 6 Sampling	was amended. Results will be reported in a LTM Period 7 Sampling
Chromium	Discharge from steel and pulp mills; Erosion of natural deposits	ppb	100	MCL	61/62	ND - 2.5 (2.0)	31/31	0.95 - 1.7 (1.6)	29/29	0.80 - 2.7 (1.5)	27/27	0.73 - 1.2 (0.98)	54/54	0.54 - 2.2 (1.2)	Results Report.	Results Report.	Results Report.
Copper	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	1,300	MCL	62/62	9.3 - 230 (60)	31/31	8.3 - 114 (43)	29/29	9.9 - 88 (31)	27/27	13 - 113 (50)	54/54	8.4 - 101 (42)			
Lead	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	15	MCL	26/62	ND - 0.82 (0.25)	17/31	ND - 0.52 (0.24)	23/29	ND - 0.75 (0.31)	14/27	ND - 0.59 (0.30)	39/54	ND - 2.8 (0.46)			
Mercury	Erosion of natural deposits; Discharge from refineries and factories; Runoff from landfills; Runoff from cropland	ppb	2.0	MCL	1/62	ND - 0.062 (0.062)	0/31	-	2/29	ND - 0.073 (0.055)	10/27	ND - 0.15 (0.086)	2/54	ND - 0.028 (0.027)			
Selenium	Discharge from petroleum and metal refineries; Erosion of natural deposits; Discharge from mines	ppb	50	MCL	2/62	ND - 1.1 (1.1)	0/31	-	8/29	ND - 0.87 (0.70)	11/27	ND - 2.1 (0.91)	44/54	ND - 2.0 (0.66)			
Thallium	Leaching from ore-processing sites; Discharge from electronics, glass, and drug factories	ppb	2.0	MCL	2/62	ND - 0.064 (0.063)	4/31	ND - 0.12 (0.095)	0/29		4/27	ND - 0.38 (0.19)	0/54	-			
Volatile Organic Compour	nds (VOCs)																
1,2-Dichloroethene	Discharge from industrial chemical factories	ppb	70	MCL	0/62	-	0/31	-	0/29	-	1/27	ND - 2.2 (2.2)	0/54	-			
Total Haloacetic acids (sum of mono-, di-, trichloroacetic acids and mono- and dibromo acetic acids)	By-product of drinking water disinfection	ppb	60	MCL	-	-	0/31	-	1/29	ND - 1.4 (1.4)	1/27	ND - 1.2 (1.2)	0/54	-	These samples will be collected 15 months	These samples will be collected 21 months	These samples will be collected 24 months
cis-1,2-Dichloroethene	Discharge from industrial chemical factories	ppb	70	EAL	2/62	ND - 0.070 (0.070)	0/31	-	0/29	-	0/27	-	0/54	-	after the health advisory was amended. Results	after the health advisory was amended. Results	after the health advisor was amended. Results
Total trihalomethanes (sum of chloroform, bromoform, bromodichloromethane, and di- bromochloromethane)	By-product of drinking water disinfection	ppb	80	MCL	-	-	8/31	ND - 6.6 (3.2)	8/29	ND - 6.6 (2.7)	6/27	ND - 7.1 (3.4)	20/54	ND - 7.1 (2.3)	will be reported in a LTM Period 5 Sampling Results Report.	will be reported in a LTM Period 6 Sampling Results Report.	will be reported in a LTM Period 7 Sampling Results Report.
trans-1,2-Dichloroethene	Discharge from industrial chemical factories	ppb	100	MCL	0/62	-	0/31	-	0/29	-	1/27	ND - 2.2 (2.2)	0/54	-			
Synthetic Organic Compo	unds (SOCs) or Semi-Volatile Orga	nic Com	pounds (SVC	OCs)													
Benzo(a)pyrene	Leaching from linings of water storage tanks and distribution lines	ppb	0.20	MCL	1/62	ND - 0.030 (0.030)	0/31	-	0/29	-	0/27	-	0/54	-	These samples will be collected 15 months after the health advisory was amended. Results	These samples will be collected 21 months after the health advisory was amended. Results	These samples will be collected 24 months after the health advisory was amended. Results
Bis(2-ethylhexyl)phthalate	Discharge from rubber and chemical factories	ppb	6.0	MCL	15/62	ND - 2.3 (1.0)	19/31	ND - 0.82 (0.64)	4/29	ND - 1.1 (0.82)	3/27	ND - 4.1 (1.9)	0/54	-	will be reported in a LTM Period 5 Sampling Results Report.	will be reported in a LTM Period 6 Sampling Results Report.	was amended. Results will be reported in a LTM Period 7 Sampling Results Report.

- 1. These contaminants are listed whether detected or non-detect (ND) because these are incident specific. All other contaminants are only listed if detected.
- 2. The DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs), previously established environmental action levels (EALs) and incident specific parameters (ISPs).
- 3. These numbers are the minimum and maximum values from all the sample test results with a detectable contaminant. An average is the sum of the results (excluding non-detects) divided by the total number results with detection only. Acronyms and explanation of terms used in this table are presented on the following pages.
- 4. For more information regarding Total Petroleum Hydrocarbons, refer to the FACT SHEET What Are Petroleum Hydrocarbons?, available online at: https://health.hawaii.gov/about/files/2021/12/21.12.16 What-Are-Petroleum-Hydrocarbons.pdf.
- 5. Total Organic Carbon (TOC) test results report any constituent containing carbon, many of which are naturally occurring and some of which may be man-made. The DOH selected a TOC project screening level of 2,000 ppb under Stage 4. Each exceedance was investigated by reviewing the associated water quality data (e.g., BTEX results, TPH) and the IDWST determined that all TOC exceedances were inconclusive in association with petroleum hydrocarbons. Under the Drinking Water Long Term Monitoring Plan (under review during the LTM Period 3 report for Zone D1), DOH revised the TOC screening level to 4,000 ppb (previously
- 6. Parts per billion (ppb) refers to the amount (or concentration) of a contaminant in the water.
- 7. Cells highlighted in green indicate the water sample results were below DOH Screening Levels.
- 8. On January 30 and February 25, 2022, DOH revised the LTM requirements to include the analysis of free chlorine. Chlorine is typically used as an additive to drinking water for disinfection purposes.
- 9. Per the June 2022 Drinking Water Long-Term Monitoring Plan, the ISP for Total TPHs was changed to 266 ppb (previously it was 211 ppb). The June 2022 Drinking Water Long-Term Monitoring Plan is available online at: https://health.hawaii.gov/about/files/2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-20220823.pdf.





Table 1-2. Contaminants Detected in Drinking Water Samples Collected from Schools in Zone D1

rable 1-2. Conta	aminants Detected in D	rinkin	g water	Samples																
						Sampling nmary		TM Sampling ry Period 1		TM Sampling ry Period 2		TM Sampling ry Period 3		M Sampling y Period 4		M Sampling y Period 5	Stage 5 LTI Summary	M Sampling / Period 6		TM Sampling ry Period 7
			DOH	Basis of	Febru	ary 2022	Apr	il 2022	Ma	y 2022	Jun	e 2022	Decem	ber 2022	June	e 2023	Decemb	per 2023	Marc	ch 2024
Contaminant	Typical Source of Contaminant	Units	Project Screening Level	DOH Screening Level ²	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³								
Contaminants of Conc	ern ¹		_			_														
Benzene	Discharge from factories; Leaching from gas storage tanks and landfills	ppb ⁶	5.0	MCL	0/5	-	0/5	-	0/6	-	0/6	-	0/5	-						
Ethylbenzene	Discharge from petroleum refineries	ppb	700	MCL	0/5	-	0/5	-	0/6	-	0/6	-	0/5	-						
Toluene	Discharge from petroleum factories	ppb	1,000	MCL	0/5	-	0/5	-	0/6	-	0/6	-	0/5	-						
Xylenes (total)	Discharge from petroleum factories; Discharge from chemical factories	ppb	10,000	MCL	0/5	-	0/5	-	0/6	-	0/6	-	0/5	-						
1-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also, present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites.	ppb	10	EAL	0/5	-	0/5	-	0/6	-	0/6	-	0/5	-						
2-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also used to make vitamin K; and is present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	EAL	0/5	-	0/5	-	0/6	-	0/6	-	0/5	-	collected after the he was amen will be re LTM Perio	mples will be 15 months ealth advisory ded. Results eported in a d 5 Sampling s Report.	These sam collected 21 the health a amended. R reported in a 6 Samplir Rep	months after dvisory was esults will be a LTM Period ag Results	collected after the he was amen will be re LTM Perio	mples will be d 24 months ealth advisory ded. Results eported in a od 7 Sampling ts Report.
Naphthalene	Naphthalene is found in coal tar or crude oil and is used in the manufacture of plastics, resins, fuels, and dyes, and as a fumigant	ppb	17	EAL	0/5	-	0/5	-	0/6	-	0/6	-	0/5	-		. пороли	, , ,			
Total TPH⁴	TPH is petroleum and can contaminate drinking water through spills and other releases into the environment	ppb	266 ¹⁰	ISP	0/5	-	1/5	ND - 59.8 (59.8)	0/6	-	0/6	-	1/5	ND - 54 (54)						
Total Organic Carbon (TOC) ⁵	Naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources	ppb	4,000	ISP	1/5	ND - 260 (260)	0/5	-	2/6	ND - 500 (475)	0/6	-	0/5	-						
Free Chlorine (Field Test) ⁸	Water additive used to control microbes	ppb	4,000	MCL	-	-	9/10	ND - 610 (165.6)	5/5	40 - 380 (226)	5/5	60 - 440 (206)	5/5	430 - 500 (458)						
Metals			•			•	•		•		•		•		•					
Barium	Discharge of drilling wastes; Discharge from metal refineries; Erosion of natural deposits	ppb	2,000	MCL	5/5	1.9 - 2.3 (2.1)	7/7	1.9 - 2.2	6/6	1.9 - 2.0 (1.9)	6/6	1.8 - 1.9 (1.9)	5/5	1.9 – 2.0 (2.0)	Theorem	mplee will be	These	- حالتين ممارد	Theorem	mples will be
Chromium	Discharge from steel and pulp mills; Erosion of natural deposits	ppb	100	MCL	5/5	2.0 - 2.2 (2.1)	7/7	1.4 - 1.9 (1.6)	6/6	0.84 - 0.96 (0.91)	6/6	0.91 - 1.1 (0.99)	5/5	1.6 - 1.9 (1.8)	collected after the he	mples will be 15 months ealth advisory ded. Results	collected 21 the health a	ples will be months after dvisory was esults will be	collected after the he	mples will be d 24 months ealth advisory ded. Results
Copper	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	1,300	MCL	5/5	79 - 210 (152)	7/7	87.3 - 218 (150)	6/6	28 - 210 (128)	6/6	34 - 209 (107)	5/5	12 - 96 (38)	will be re LTM Perio	ported in a d 5 Sampling s Report.	reported in a 6 Samplir	LTM Period	will be re LTM Perio	eported in a od 7 Sampling ts Report.
Lead	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	15	MCL	5/5	0.19 - 0.59 (0.35)	6/8	ND - 1.4 (0.55)	5/6	ND - 3.6 (1.1)	5/6	ND - 1.1 (0.44)	4/5	ND - 0.35 (0.2)						





Mercury	Erosion of natural deposits; Discharge from refineries and factories; Runoff from landfills; Runoff from cropland	ppb	2.0	MCL	0/5	-	0/7	_9	1/6	ND - 0.030 (0.030)	0/6	-	4/5	ND - 0.11 (0.083)	These samples will be	These samples will be	These samples will be
Selenium	Discharge from petroleum and metal refineries; Erosion of natural deposits; Discharge from mines	ppb	50	MCL	0/5	-	0/7	-	6/6	0.48 - 0.92 (0.69)	0/6	-	0/5	-	collected 15 months after the health advisory was amended. Results will be reported in a LTM Period 5 Sampling	collected 21 months after the health advisory was amended. Results will be reported in a LTM Period 6 Sampling Results	collected 24 months after the health advisory was amended. Results will be reported in a LTM Period 7 Sampling
Thallium	Leaching from ore-processing sites; Discharge from electronics, glass, and drug factories	ppb	2.0	MCL	1/5	ND - 0.062 (0.062)	0/7	-	0/6	-	0/6	-	0/5	-	Results Report.	Report.	Results Report.
Volatile Organic Compo	unds (VOCs)																
Total Haloacetic acids (sum of mono-, di-, trichloroacetic acids and mono- and dibromo acetic acids)	By-product of drinking water disinfection	ppb	60	MCL	0/5	-	0/5	-	0/6	-	1/6	ND - 1.0 (1.0)	0/5	-	These samples will be collected 15 months after the health advisory	These samples will be collected 21 months after the health advisory was	These samples will be collected 24 months after the health advisory
Total trihalomethanes (sum of chloroform, bromoform, bromodichloromethane, and di- bromochloromethane)	By-product of drinking water disinfection	ppb	80	MCL	-	-	4/5	ND - 8.2 (2.9)	2/6	ND - 6.7 (4.9)	2/6	ND - 3.9 (3.3)	1/5	ND - 0.28 (0.28)	was amended. Results will be reported in a LTM Period 5 Sampling Results Report.	amended. Results will be reported in a LTM Period 6 Sampling Results Report.	was amended. Results will be reported in a LTM Period 7 Sampling Results Report.
Synthetic Organic Comp	oounds (SOCs) or Semi-Volatile (Organic (Compounds ((SVOCs)													
Benzo(a)pyrene	Leaching from linings of water storage tanks and distribution lines	ppb	0.20	MCL	0/5	-	0/5	-	2/6	ND - 0.023 (0.023)	0/6	-	0/5	-	These samples will be collected 15 months after the health advisory	These samples will be collected 21 months after the health advisory was	These samples will be collected 24 months after the health advisory
Bis(2- ethylhexyl)phthalate	Discharge from rubber and chemical factories	ppb	6.0	MCL	0/5	-	4/5	ND - 0.8 (0.63)	0/6	-	0/6	-	0/5	-	was amended. Results will be reported in a LTM Period 5 Sampling Results Report.	amended. Results will be reported in a LTM Period 6 Sampling Results Report.	was amended. Results will be reported in a LTM Period 7 Sampling Results Report.
Notes:																	

- 1. These contaminants are listed whether detected or non-detect (ND) because these are incident specific. All other contaminants are only listed if detected.
- 2. The DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs), previously established environmental action levels (EALs) and incident specific parameters (ISPs).
- 3. These numbers are the minimum and maximum values from all the sample test results with a detectable contaminant. An average is the sum of the results (excluding non-detects) divided by the total number results with detection only. Acronyms and explanation of terms used in this table are presented on the following pages.
- 4. For more information regarding Total Petroleum Hydrocarbons, refer to the FACT SHEET What Are Petroleum Hydrocarbons?, available online at: https://health.hawaii.gov/about/files/2021/12/21.12.16 What-Are-Petroleum-Hydrocarbons.pdf.
- 5. Total Organic Carbon (TOC) test results report any constituent containing carbon, many of which are naturally occurring and some of which may be man-made. The DOH selected a TOC project screening level of 2,000 ppb under Stage 4. Each exceedance was investigated by reviewing the associated water guality data (e.g., BTEX results, TPH) and the IDWST determined that all TOC exceedances were inconclusive in association with petroleum hydrocarbons. Under the Drinking Water Long Term Monitoring Plan (under review during the LTM Period 3 report for Zone D1), DOH revised the TOC exceedances were inconclusive in association with petroleum hydrocarbons.
- 6. Parts per billion (ppb) refers to the amount (or concentration) of a contaminant in the water.
- 7. Cells highlighted in green indicate the water sample results were below DOH Screening Levels.
- 8. On January 30 and February 25, 2022, DOH revised the LTM requirements to include the analysis of free chlorine. Chlorine is typically used as an additive to drinking water for disinfection purposes.
- 9. This does not include the March 13, 2022 (initial) mercury results from Pearl Harbor Kai Elementary (Field Sample Number: D1-TW-0015098-22060-N-1-R1 and D1-TW-0015098-22060-N-1-R2). This does include the resampled results from Pearl Harbor Kai Elementary. This exceedance was associated with Premise Plumbing and is not associated with Plumbing and Is not associated w D1 LTM Period 1 posted on the Safe Waters website https://jbphh-safewaters.org.
 - a) The sample result collected from Pearl Harbor Kai Elementary on March 13, 2022 was 3.9 ppb for mercury. This exceeded the MCL of 2 ppb. Investigation into this exceeded the MCL of 2 ppb. Investigation into this exceeded the MCL of 2 ppb. Investigation into this exceeded the MCL of 2 ppb. Investigation was warranted through additional sampling. The re-sample results were non-detect.
- b) The sample results collected from the replaced plumbing fixture following the mercury exceedance (pre-flush and April 01, 2022 were 18.1 ppb and 26.3 ppb for lead, respectively. Investigation into the exceedances determined that it was likely a result of the newly replaced fixture and was re-flushed. The resample results were below the action level of 15 ppb. The fixture was secured following the mercury exceedance and not released for use until after the lead resample results were below the action level.
- 10. Per the June 2022 Drinking Water Long-Term Monitoring Plan, the ISP for Total TPHs was changed to 266 ppb (previously it was 211 ppb). The June 2022 Drinking Water Long-Term Monitoring Plan is available online at: https://health.hawaii.gov/about/files/2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-20220823.pdf.





Table 1-3. Contaminants Detected in Drinking Water Samples Collected from Child Development Centers in Zone D1

Table 1-3. Conta	minants Detected in Drink	ing W	later Sam	ples Col	lected fr	om Child		•	enters in	Zone D1							I			
						Sampling nmary		TM Sampling ry Period 1		M Sampling y Period 2		M Sampling ry Period 3		M Sampling y Period 4		TM Sampling ry Period 5	Stage 5 LTI Summary	M Sampling Period 6		M Sampling y Period 7
			DOH	Basis of	Februa	ary 2022	Apri	il 2022	May	2022	Jun	e 2022	Decem	ber 2022	Jun	e 2023	Decemb	er 2023	Marc	h 2024
Contaminant	Typical Source of Contaminant	Units	Project Screening Level	DOH Screening Level ²	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³
Contaminants of Conc	ern ¹							_			_	•		•	_					•
Benzene	Discharge from factories; Leaching from gas storage tanks and landfills	ppb ⁶	5.0	MCL	0/4	-	0/4	-	0/6	-	0/5	-	0/4	-						
Ethylbenzene	Discharge from petroleum refineries	ppb	700	MCL	0/4	-	0/4	-	0/6	-	0/5	-	0/4	-						
Toluene	Discharge from petroleum factories	ppb	1,000	MCL	0/4	-	0/4	-	0/6	-	0/5	-	0/4	-						
Xylenes (total)	Discharge from petroleum factories; Discharge from chemical factories	ppb	10,000	MCL	0/4	-	0/4	-	0/6	-	0/5	-	0/4	-						
1-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also, present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites.	ppb	10	EAL	0/4	-	0/4	-	0/6	-	0/5	-	0/4	-						
2-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also used to make vitamin K; and is present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	EAL	0/4	-	0/4	-	0/6	-	0/5	-	0/4	-	collected after the he was amen will be re	mples will be 15 months ealth advisory ded. Results eported in a d 5 Sampling	collected : after the hea		collected after the he was amen will be re LTM Period	nples will be 24 months ealth advisory ded. Results ported in a d 7 Sampling
Naphthalene	Naphthalene is found in coal tar or crude oil and is used in the manufacture of plastics, resins, fuels, and dyes, and as a fumigant	ppb	17	EAL	0/4	-	0/4	-	0/6	-	0/5	-	0/4	-	Result	s Report.	Results	Report.	Results	s Report.
Total TPH⁴	TPH is petroleum and can contaminate drinking water through spills and other releases into the environment	ppb	266 ⁹	ISP	0/4	-	3/4	ND - 65 (60)	1/6	ND - 52 (52)	2/5	ND - 59 (55)	1/4	ND - 92 (92)						
Total Organic Carbon (TOC)⁵	Naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources	ppb	4,000	ISP	0/4	-	1/4	ND - 210 (210)	0/6	-	0/5	-	0/4	-						
Free Chlorine (Field Test) ⁸	Water additive used to control microbes	ppb	4,000	MCL	-	-	5/5	240 - 400 (338)	4/4	50 - 540 (403)	4/4	60 - 510 (360)	-	-						
Metals																				
Antimony	Discharge from petroleum refineries; fire retardants; ceramics; electronics; solder	ppb	6.0	MCL	1/4	ND - 0.12 (0.12)	0/4	-	0/6	-	2/5	ND - 0.13 (0.13)	0/4	-						
Barium	Discharge of drilling wastes; Discharge from metal refineries; Erosion of natural deposits	ppb	2,000	MCL	4/4	1.9 - 2.3 (2.1)	2/4	ND - 2.2 (2.2)	6/6	1.9 - 2.0 (1.9)	5/5	1.7 - 2.0 (1.9)	4/4	1.8 - 1.9 (1.9)	(1.9) These samples			ples will be		mples will be
Chromium	Discharge from steel and pulp mills; Erosion of natural deposits	ppb	100	MCL	4/4	1.9 - 2.1 (2.0)	4/4	1.2 - 1.4 (1.3)	6/6	1.6 - 1.7 (1.7)	5/5	0.95 - 1.2 (1.0)	4/4	1.6 - 1.8 (1.7)	1.6 - 1.8 collected 1 after the hear was amended		after the hea	21 months alth advisory ed. Results	after the he	24 months ealth advisory ded. Results
Copper	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	1,300	MCL	4/4	13 - 220 (108)	4/4	18 - 69 (46)	6/6	10 - 71 (36)	5/5	15 - 80 (38)	4/4	9.3 - 93 (49)	LTM Perio	eported in a d 5 Sampling s Report.	will be repor Period 6 Results		LTM Period	ported in a d 7 Sampling s Report.
Lead	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	15	MCL	2/4	ND - 0.38 (0.36)	3/4	ND - 0.36 (0.23)	3/6	ND - 0.37 (0.30)	4/5	ND - 0.61 (0.29)	1/4	ND - 0.82 (0.82)	- Nosuit	o rioport.	rosuits	тороги.	roduk	с пороп.
Thallium	Leaching from ore-processing sites; Discharge from electronics, glass, and drug factories	ppb	2.0	MCL	1/4	ND - 0.067 (0.067)	0/4	-	0/6	-	0/5	-	0/4	-						





Volatile Organic Compo	ounds (VOCs)																
1,2-Dichloroethene	Discharge from industrial chemical factories	ppb	70	MCL	1/4	ND - 0.07 (0.07)	0/4	-	0/6	-	1/5	ND - 2.2 (2.2)	0/4	-			
cis-1,2-Dichloroethene	Discharge from industrial chemical factories	ppb	70	MCL	1/4	ND - 0.070 (0.070)	0/4	-	0/6	-	0/5	-	0/4	-	These samples will be collected 15 months	These samples will be collected 21 months	These samples will be collected 24 months
Total trihalomethanes (sum of chloroform, bromoform, bromodichloromethane, and di- bromochloromethane)	By-product of drinking water disinfection	ppb	80	MCL	-	-	2/4	ND - 1.4 (0.98)	0/6	1	1/5	ND - 1.2 (1.2)	2/4	ND - 0.61 (0.58)	after the health advisory was amended. Results will be reported in a LTM Period 5 Sampling Results Report.	after the health advisory was amended. Results will be reported in a LTM Period 6 Sampling Results Report.	after the health advisory was amended. Results will be reported in a LTM Period 7 Sampling Results Report.
trans-1,2- Dichloroethene	Discharge from industrial chemical factories	ppb	100	MCL	0/4	-	0/4	-	0/6		1/5	ND - 2.2 (2.2)	0/4				
Synthetic Organic Com	pounds (SOCs) or Semi-Volatile Organ	ic Comp	ounds (SVOC	s)													
Bis(2- ethylhexyl)phthalate	Discharge from rubber and chemical factories	ppb	6.0	MCL	0/4	-	3/4	ND - 0.84 (0.77)	0/6	-	0/5	-	0/4	-	These samples will be collected 15 months after the health advisory was amended. Results will be reported in a LTM Period 5 Sampling Results Report.	These samples will be collected 21 months after the health advisory was amended. Results will be reported in a LTM Period 6 Sampling Results Report.	These samples will be collected 24 months after the health advisory was amended. Results will be reported in a LTM Period 7 Sampling Results Report.

Nistas

- 1. These contaminants are listed whether detected or non-detect (ND) because these are incident specific. All other contaminants are only listed if detected.
- 2. The DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs), previously established environmental action levels (EALs) and incident specific parameters (ISPs).
- 3. These numbers are the minimum and maximum values from all the sample test results. The average (or mathematical mean) includes all sample test results with a detectable contaminant. An average is the sum of the results (excluding non-detects) divided by the total number results with detection only. Acronyms and explanation of terms used in this table are presented on the following pages.
- 4. For more information regarding Total Petroleum Hydrocarbons, refer to the FACT SHEET What Are Petroleum Hydrocarbons?, available online at: https://health.hawaii.gov/about/files/2021/12/21.12.16 What-Are-Petroleum-Hydrocarbons.pdf.
- 5. Total Organic Carbon (TOC) test results report any constituent containing carbon, many of which are naturally occurring and some of which may be man-made. The DOH selected a TOC project screening level of 2,000 ppb under Stage 4. Each exceedance was investigated by reviewing the associated water quality data (e.g., BTEX results, TPH) and the IDWST determined that all TOC exceedances were inconclusive in association with petroleum hydrocarbons. Under the Drinking Water Long Term Monitoring Plan (under review during the LTM Period 3 report for Zone D1), DOH revised the TOC screening level to 4,000 ppb (previously 2,000 ppb)
- 6. Parts per billion (ppb) refers to the amount (or concentration) of a contaminant in the water.
- 7. Cells highlighted in green indicate the water sample results were below DOH Screening Levels.
- 8. On January 30 and February 25, 2022, DOH revised the LTM requirements to include the analysis of free chlorine. Chlorine is typically used as an additive to drinking water for disinfection purposes.
- 9. Per the June 2022 Drinking Water Long-Term Monitoring Plan, the ISP for Total TPHs was changed to 266 ppb (previously it was 211 ppb). The June 2022 Drinking Water Long-Term Monitoring Plan is available online at: <a href="https://health.hawaii.gov/about/files/2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPH-Drinking-Water-LTM-Plan-FINAL-2022/08/JBPH-Drinking-Water





Table 1-4. Contaminants Detected in Drinking Water Samples Collected from Other Buildings in Zone D1

Table 1-4. Conta	aminants Detected in D	rinkir	ng Water	Samples	Collected	d from Ot	her Build	dings in Z	one D1				1						1	
					_	Sampling nmary		ΓM Sampling ry Period 1		M Sampling y Period 2		ΓM Sampling ry Period 3		TM Sampling ry Period 4		ΓM Sampling ry Period 5		M Sampling y Period 6		M Sampling by Period 7
			DOH Project	Basis of DOH	Februa	ary 2022	Apr	il 2022	Мау	2022	Jun	e 2022	Decem	ber 2022	Jun	e 2023	Decem	ber 2023	Marc	h 2024
Contaminant	Typical Source of Contaminant	Units	Screening Level	Screening Level ²	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³								
Contaminants of Cond	cern ¹																			
Benzene	Discharge from factories; Leaching from gas storage tanks and landfills	ppb ⁶	5.0	MCL	0/1	-	0/4	-	0/5	-	0/4	-	0/8	-						
Ethylbenzene	Discharge from petroleum refineries	ppb	700	MCL	0/1	-	0/4	-	0/5	-	0/4	-	0/8	-						
Toluene	Discharge from petroleum factories	ppb	1,000	MCL	0/1	-	0/4	-	0/5	-	0/4	-	0/8	-						
Xylenes (total)	Discharge from petroleum factories; Discharge from chemical factories	ppb	10,000	MCL	0/1	-	0/4	-	0/5	-	0/4	-	0/8	-						
1-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also, present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites.	ppb	10	EAL	0/1	-	0/4	-	0/5	-	0/4	-	0/8	-						
2-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also used to make vitamin K; and is present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	EAL	0/1	-	0/4	-	0/5	-	0/4	-	0/8	-	collected after the he was amen will be repo	mples will be 15 months ealth advisory ded. Results orted in a LTM 5 Sampling s Report.	collected after the he was amend will be report Period 6	nples will be 21 months alth advisory ded. Results rted in a LTM Sampling Report.	collected after the he was amen will be repo Period 7	nples will be 24 months ealth advisory ded. Results rted in a LTM Sampling s Report.
Naphthalene	Naphthalene is found in coal tar or crude oil and is used in the manufacture of plastics, resins, fuels, and dyes, and as a fumigant	ppb	17	EAL	0/1	-	0/4	-	0/5	-	0/4	-	0/8	-		·		·		·
Total TPH⁴	TPH is petroleum and can contaminate drinking water through spills and other releases into the environment	ppb	266 ⁹	ISP	0/1	-	2/4	ND - 92 (80)	3/5	ND - 83 (70)	0/4	-	5/8	ND - 66 (61)						
Total Organic Carbon (TOC) ⁵	Naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources	ppb	4,000	ISP	0/1	-	1/4	ND - 230 (230)	0/5	-	0/4	-	0/8	-						
Free Chlorine (Field Test) ⁸	Water additive used to control microbes	ppb	4,000	MCL	-	-	4/4	160 - 630 (423)	4/4	230 - 720 (468)	4/4	30 - 290 (95)	8/8	70 - 600 (330)						
Metals		ı				1	1				•									
Antimony	Discharge from petroleum refineries; fire retardants; ceramics; electronics; solder	ppb	6.0	MCL	0/1	-	0/4	-	1/5	ND - 0.14 (0.14)	0/4	-	0/8	-	collected	mples will be 15 months ealth advisory	collected	nples will be 21 months alth advisory	collected	nples will be 24 months ealth advisory
Barium	Discharge of drilling wastes; Discharge from metal refineries; Erosion of natural deposits	ppb	2,000	MCL	1/1	1.9 - 1.9 (1.9)	3/4	ND - 2.2 (2.1)	3/5	ND - 2.1 (2.0)	4/4	1.9 - 3.0 (2.4)	8/8	1.9 - 2.4 (2.0)	was amen will be repo Period 5	ded. Results orted in a LTM 5 Sampling s Report.	was ameno will be repor Period 6	ded. Results rted in a LTM Sampling s Report.	was amen will be repo Period 7	ded. Results rted in a LTM Sampling s Report.
Beryllium	Discharge from metal refineries and coal-burning factories;	ppb	4.0	MCL	0/1	-	0/4	-	0/5	-	1/4	ND - 0.17 (0.17)	0/8	-		mples will be 15 months		nples will be 21 months	These sar collected	nples will be 24 months





	Discharge from electrical,]								after the health advisory	after the health advisory	after the health advisory
	aerospace, and defense industries														was amended. Results will be reported in a LTM	was amended. Results will be reported in a LTM	was amended. Results will be reported in a LTM
Cadmium	By-product of drinking water disinfection	ppb	5.0	MCL	0/1	-	0/4	-	0/5	-	1/4	ND - 0.15 (0.15)	1/8	ND - 0.068 (0.068)	Period 5 Sampling Results Report.	Period 6 Sampling Results Report.	Period 7 Sampling Results Report.
Chromium	Discharge from steel and pulp mills; Erosion of natural deposits	ppb	100	MCL	1/1	2.3 - 2.3 (2.3)	4/4	1.3 - 1.4 (1.4)	5/5	0.84 - 1.7 (1.1)	3/4	ND - 1.1 (0.98)	8/8	1.2 - 2 (1.8)			
Copper	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	1,300	MCL	1/1	21 - 21 (21)	4/4	24 - 84 (51)	5/5	6.9 - 78 (42)	4/4	4.6 - 260 (106)	8/8	19 - 108 (62)			
Lead	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	15	MCL	0/1	-	3/4	ND - 0.25 (0.19)	5/5	0.15 - 0.49 (0.31)	4/4	0.31 - 0.76 (0.47)	7/8	ND - 0.69 (0.31)			
Mercury	Erosion of natural deposits; Discharge from refineries and factories; Runoff from landfills; Runoff from cropland	ppb	2.0	MCL	0/1	-	0/4	-	1/5	ND - 0.029 (0.029)	1/4	ND - 0.078 (0.078)	0/8	-			
Selenium	Discharge from petroleum and metal refineries; Erosion of natural deposits; Discharge from mines	ppb	50	MCL	0/1	-	0/4	-	4/5	ND - 0.68 (0.54)	2/4	ND - 1.0 (0.65)	1/8	ND - 0.51 (0.51)			
Thallium	Leaching from ore-processing sites; Discharge from electronics, glass, and drug factories	ppb	2.0	MCL	0/1	-	1/4	ND - 0.063 (0.063)	0/5	-	1/4	ND - 0.44 (0.44)	1/8	ND - 0.053 (0.053)			
Volatile Organic Compo	ounds (VOCs)																
Total trihalomethanes (sum of chloroform, bromoform, bromodichloromethane, and di- bromochloromethane)	By-product of drinking water disinfection	ppb	80	MCL	-	-	2/4	ND - 1.1 (0.88)	0/5	-	3/4	ND - 1.6 (1.0)	6/8	ND - 9 (2.5)	These samples will be collected 15 months after the health advisory was amended. Results will be reported in a LTM Period 5 Sampling Results Report.	These samples will be collected 21 months after the health advisory was amended. Results will be reported in a LTM Period 6 Sampling Results Report.	These samples will be collected 24 months after the health advisory was amended. Results will be reported in a LTM Period 7 Sampling Results Report.
Synthetic Organic Com	npounds (SOCs) or Semi-Volatile	Organic	Compounds	(SVOCs)													
Bis(2- ethylhexyl)phthalate	Discharge from rubber and chemical factories	ppb	6	MCL	0/1	-	2/4	ND - 0.87 (0.85)	0/5	-	0/4	-	1/8	ND - 1.8 (1.8)	These samples will be collected 15 months after the health advisory was amended. Results will be reported in a LTM Period 5 Sampling Results Report.	These samples will be collected 21 months after the health advisory was amended. Results will be reported in a LTM Period 6 Sampling Results Report.	These samples will be collected 24 months after the health advisory was amended. Results will be reported in a LTM Period 7 Sampling Results Report.
							. —										

- 1. These contaminants are listed whether detected or non-detect (ND) because these are incident specific. All other contaminants are only listed if detected.
- 2. The DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs), previously established environmental action levels (EALs) and incident specific parameters (ISPs).
- 3. These numbers are the minimum and maximum values from all the sample test results with a detectable contaminant. An average is the sum of the results (excluding non-detects) divided by the total number results with detection only. Acronyms and explanation of terms used in this table are presented on the following pages.
- 4. For more information regarding Total Petroleum Hydrocarbons, refer to the FACT SHEET What Are Petroleum Hydrocarbons?, available online at: https://health.hawaii.gov/about/files/2021/12/21.12.16 What-Are-Petroleum-Hydrocarbons.pdf.
- 5. Total Organic Carbon (TOC) test results report any constituent containing carbon, many of which are naturally occurring and some of which may be man-made. The DOH selected a TOC project screening level of 2,000 ppb under Stage 4. Each exceedance was investigated by reviewing the associated water quality data (e.g., BTEX results, TPH) and the IDWST determined that all TOC exceedances was inconclusive in association with petroleum hydrocarbons. Under the Drinking Water Long Term Monitoring Plan (under review during the LTM Period 2 report for Zone D1), DOH revised the TOC screening level to 4,000 ppb (previously 2,000 ppb).
- 6. Parts per billion (ppb) refers to the amount (or concentration) of a contaminant in the water.
- 7. Cells highlighted in green indicate the water sample results were below DOH Screening Levels.
- 8. On January 30 and February 25, 2022, DOH revised the LTM requirements to include the analysis of free chlorine. Chlorine is typically used as an additive to drinking water for disinfection purposes.
- 9. Per the June 2022 Drinking Water Long-Term Monitoring Plan, the ISP for Total TPHs was changed to 266 ppb (previously it was 211 ppb). The June 2022 Drinking Water Long-Term Monitoring Plan is available online at: https://health.hawaii.gov/about/files/2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-20220823.pdf.





Table 1-5. Contaminants Detected in Drinking Water Samples Collected from Fire Hydrants in Zone D1

						Sampling nmary		TM Sampling ry Period 1		M Sampling y Period 2		M Sampling y Period 3		M Sampling y Period 4		M Sampling y Period 5	Stage 5 LTI Summary	M Sampling Period 6		M Sampling y Period 7
			рон	Basis of	Febru	ary 2022	Apr	il 2022	May	2022	Jun	e 2022	Decem	ber 2022	June	2023	Decemb	er 2023	Marc	h 2024
Contaminant	Typical Source of Contaminant	Units	Project Screening Level	DOH Screening Level ²	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³								
Contaminants of Concern	1	1																		
Benzene	Discharge from factories; Leaching from gas storage tanks and landfills	ppb ⁶	5.0	MCL	0/5	-	0/6	-	0/6	-	0/6	-	0/8	-						
Ethylbenzene	Discharge from petroleum refineries	ppb	700	MCL	0/5	-	0/6	-	0/6	-	0/6	-	0/8	-						
Toluene	Discharge from petroleum factories	ppb	1,000	MCL	0/5	-	0/6	-	0/6	-	0/6	-	0/8	-						
Xylenes (total)	Discharge from petroleum factories; Discharge from chemical factories	ppb	10,000	MCL	0/5	-	0/6	-	0/6	-	0/6	-	0/8	-						
1-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also, present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites.	ppb	10	EAL	1/5	ND - 0.031 (0.031)	0/6	-	0/6	-	0/6	-	0/8	-						
2-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also used to make vitamin K; and is present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	EAL	1/5	ND - 0.044 (0.044)	0/6	-	0/6	-	0/6	-	0/8	-	collected after the he was amend will be report Period 5	Sampling	These sam collected 21 the health a amended. Ro reported in a 6 Samplir	months after dvisory was esults will be LTM Period g Results	collected after the he was amend will be report Period 7	nples will be 24 months alth advisory ded. Results rted in a LTM Sampling
Naphthalene	Naphthalene is found in coal tar or crude oil and is used in the manufacture of plastics, resins, fuels, and dyes, and as a fumigant	ppb	17	EAL	1/5	ND - 0.063 (0.063)	0/6	-	0/6	-	0/6	-	0/8	-	was afficied will be reported Period 5 Sa Results R	s Report.	Rep	oort.	Results	s Report.
Total TPH⁴	TPH is petroleum and can contaminate drinking water through spills and other releases into the environment	ppb	266 ⁹	ISP	0/5	-	1/6	ND - 55 (55)	2/6	ND - 60 (57)	4/6	ND - 76 (61)	5/8	ND - 89 (69)						
Total Organic Carbon (TOC) ⁵	Naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources	ppb	4,000	ISP	0/5	-	4/6	ND - 540 (420)	0/6	-	0/6	-	0/8	-						
Free Chlorine (Field Test) ⁸	Water additive used to control microbes	ppb	4,000	MCL	-	-	5/6	ND - 420 (276)	6/6	200 - 660 (487)	6/6	50 - 510 (280)	-	-	-					
Metals																				
Arsenic	Erosion of natural deposits; Runoff from orchards; Runoff from glass and electronics production wastes	ppb	10	MCL	5/5	0.13 - 0.39 (0.31)	0/6	-	0/6	-	0/6	-	0/8	-	collected after the he	nples will be 15 months alth advisory ded. Results	These sam collected 21 the health a amended. Re	months after dvisory was	collected after the he	nples will be 24 months alth advisory ded. Results
Barium	Discharge of drilling wastes; Discharge from metal refineries; Erosion of natural deposits	ppb	2,000	MCL	5/5	1.7 - 16 (6.8)	6/6	1.8 - 15 (6.4)	6/6	1.8 - 3.9 (2.5)	6/6	1.9 - 14 (4.7)	8/8	1.9 - 14 (5.0)	will be repo	rted in a LTM Sampling s Report.	reported in a 6 Samplir Rep	LTM Period g Results	will be report	rted in a LTM Sampling S Report.
Beryllium	Discharge from metal refineries and coal-burning factories; Discharge from electrical,	ppb	4.0	MCL	0/5	-	0/6	-	0/6	-	5/6	ND - 0.26 (0.22)	0/8	-	collected	nples will be 15 months alth advisory	These sam collected 21 the health a	months after	collected	nples will be 24 months alth advisory





	aerospace, and defense industries														was amended. Results will be reported in a LTM Period 5 Sampling	amended. Results will be reported in a LTM Period 6 Sampling Results	was amended. Results will be reported in a LTM Period 7 Sampling
Cadmium	By-product of drinking water disinfection	ppb	5.0	MCL	0/5	-	0/6	-	0/6	-	5/6	ND - 0.25 (0.2)	0/8	-	Results Report.	Report.	Results Report.
Chromium	Discharge from steel and pulp mills; Erosion of natural deposits	ppb	100	MCL	5/5	0.47 - 1.5 (1.1)	5/6	ND - 1.7 (1.1)	6/6	0.72 - 0.93 (0.81)	5/6	ND - 1.0 (0.86)	8/8	0.7 - 1.8 (1.5)			
Copper	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	1,300	MCL	5/5	0.38 - 4.3 (2.4)	4/6	ND - 4.6 (3.5)	6/6	2.1 - 8.7 (4.8)	6/6	0.56 - 13 (5.0)	_10	_10			
Lead	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	15	MCL	4/5	ND - 0.64 (0.4)	4/6	ND - 0.67 (0.54)	4/6	ND - 0.53 (0.37)	6/6	0.25 - 1.2 (0.70)	_10	_10			
Mercury	Erosion of natural deposits; Discharge from refineries and factories; Runoff from landfills; Runoff from cropland	ppb	2.0	MCL	1/4	ND - 0.018 (0.018)	0/6	-	1/6	ND - 0.028 (0.028)	0/6	-	0/8	-			
Selenium	Discharge from petroleum and metal refineries; Erosion of natural deposits; Discharge from mines	ppb	50	MCL	5/5	0.38 - 2.1 (1.4)	1/6	ND - 0.32 (0.32)	6/6	0.61 - 0.83 (0.74)	0/6	-	0/8	-			
Thallium	Leaching from ore-processing sites; Discharge from electronics, glass, and drug factories	ppb	2.0	MCL	0/5	-	1/6	ND - 0.072 (0.072)	0/6	-	5/6	ND - 0.74 (0.46)	0/8	-			
Volatile Organic Compoun	ids (VOCs)																
Total Haloacetic acids (sum of mono-, di-, trichloroacetic acids and mono- and dibromoacetic acids)	By-product of drinking water disinfection	ppb	60	MCL	-	-	1/6	ND - 1.2 (1.2)	0/6	-	1/6	ND - 1.4 (1.4)	0/8	-	These samples will be collected 15 months after the health advisory	These samples will be collected 21 months after the health advisory was	These samples will be collected 24 months after the health advisory
Total trihalomethanes (sum of chloroform, bromoform, bromodichloromethane, and di-	By-product of drinking water disinfection	ppb	80	MCL	-	-	3/6	ND - 7.8 (4.6)	2/6	ND - 6.5 (4.4)	2/6	ND - 8.5 (6.9)	4/8	ND - 4.6 (2.5)	was amended. Results will be reported in a LTM Period 5 Sampling Results Report.	amended. Results will be reported in a LTM Period 6 Sampling Results Report.	was amended. Results will be reported in a LTM Period 7 Sampling Results Report.
bromochloromethane) Synthetic Organic Compo	unds (SOCs) or Semi-Volatile Org	anic Con	npounds (SV	OCs)													
.	, , , , , , , , , , , , , , , , , , ,			, 													
Benzo(a)pyrene	Leaching from linings of water storage tanks and distribution lines	ppb	0.2	MCL	0/5	-	0/6	-	0/6	-	0/6	-	1/8	ND - 0.03 (0.03)	These samples will be collected 15 months after the health advisory was amended. Results	These samples will be collected 21 months after the health advisory was amended. Results will be	These samples will be collected 24 months after the health advisory was amended. Results
Bis(2-ethylhexyl)phthalate	Discharge from rubber and chemical factories	ppb	6.0	MCL	0/5	-	2/6	ND - 0.51 (0.47)	0/6	-	0/6		0/8	-	was amended. Results will be reported in a LTM Period 5 Sampling Results Report.	amended. Results Will be reported in a LTM Period 6 Sampling Results Report.	was amended. Results will be reported in a LTM Period 7 Sampling Results Report.
Notes:	1						1		1		1					1	ı

- 1. These contaminants are listed whether detected or non-detect (ND) because these are incident specific. All other contaminants are only listed if detected.
- 2. The DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs), previously established environmental action levels (EALs) and incident specific parameters (ISPs).
- 3. These numbers are the minimum and maximum values from all the sample test results. The average (or mathematical mean) includes all sample test results (excluding non-detects) divided by the total number results with detection only. Acronyms and explanation of terms used in this table are presented on the following pages.
- 4. For more information regarding Total Petroleum Hydrocarbons, refer to the FACT SHEET What Are Petroleum Hydrocarbons?, available online at: https://health.hawaii.gov/about/files/2021/12/21.12.16 What-Are-Petroleum-Hydrocarbons.pdf.
- Inconclusive in association with petroleum hydrocarbons. Under the Drinking Water Long Term Monitoring Plan (under review during the LTM Period 3 report for Zone D1), DOH revised the TOC screening level to 4,000 ppb (previously 2,000 ppb).
- 6. Parts per billion (ppb) refers to the amount (or concentration) of a contaminant in the water.
- 7. Cells highlighted in green indicate the water sample results were below DOH Screening Levels.
- 8. On January 30 and February 25, 2022, DOH revised the LTM requirements to include the analysis of free chlorine. Chlorine is typically used as an additive to drinking water for disinfection purposes.





- 9. Per the June 2022 Drinking Water Long-Term Monitoring Plan, the ISP for Total TPHs was changed to 266 ppb (previously it was 211 ppb). The June 2022 Drinking Water Long-Term Monitoring Plan is available online at: https://health.hawaii.gov/about/files/2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-20220823 ndf
- 10. Per the June 2022 Drinking Water Long-Term Monitoring Plan, Lead and Copper samples will only be collected from residences, other buildings and the entry points to the distribution system during LTM Months 4-24. The June 2022 Drinking Water Long-Term Monitoring Plan is available online at: https://health.hawaii.gov/about/files/2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-20220823.pdf.





Table 1-6. Contaminants Detected in Drinking Water Samples Collected from JBPHH's Source Water (Waiawa Shaft - Post

Chlorination)

Chiorination)	1												
					Sample	Period: Jan	uary 2022	Sample Period: June 2022			Sample Period: December 2022		
Contaminant	Typical Source of Contaminant	Units	DOH Project Screening Level	Basis of DOH Screening Level ²	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)
Contaminants of Cor	ncern ¹												
Benzene	Discharge from factories; Leaching from gas storage tanks and landfills	ppb ⁴	5.0	MCL	0/1	-	Yes	0/1	-	Yes	0/1	-	Yes
Ethylbenzene	Discharge from petroleum refineries	ppb	700	MCL	0/1	-	Yes	0/1	-	Yes	0/1	-	Yes
Toluene	Discharge from petroleum factories	ppb	1,000	MCL	0/1	-	Yes	0/1	-	Yes	0/1	-	Yes
m,p,o-Xylenes	Discharge from petroleum factories; Discharge from chemical factories	ppb	10,000	MCL	0/1	-	Yes	0/1	-	Yes	0/1	-	Yes
1-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also, present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	ISP	0/1	-	Yes	0/1	-	Yes	0/1	-	Yes
2-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also used to make vitamin K; and is present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	ISP	0/1	-	Yes	0/1	-	Yes	0/1	,	Yes
Naphthalene	Naphthalene is found in coal tar or crude oil and is used in the manufacture of plastics, resins, fuels, and dyes, and as a fumigant	ppb	17	ISP	0/1	-	Yes	0/1	-	Yes	0/1	-	Yes
Total Petroleum Hydrocarbons (TPHs)	TPH is petroleum and can contaminate drinking water through spills and other releases into the environment	ppb	266 ⁹	ISP	0/1	-	Yes ³	0/1	-	Yes	0/1	-	Yes





					Sample Period: January 2022		Samp	le Period: Jι	ıne 2022	Sample Period: December 2022			
Contaminant	Typical Source of Contaminant	Units	DOH Project Screening Level	Basis of DOH Screening Level ²	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)
Total Organic Carbon (TOC) ⁴	Naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources	ppb	4,000	ISP	0/1	-	Yes	0/1	-	Yes	0/1	-	Yes
Free Chlorine (Field Test) ⁸	Water Additive	ppb	4,000	MCL	-	•	-	1/1	670	Yes	1	-	-
Metals													
Antimony	Discharge from petroleum refineries; fire retardants; ceramics; electronics; solder	ppb	6.0	MCL	1/1	0.092	Yes	0/1	-	Yes	0/1	-	Yes
Arsenic	Erosion of natural deposits; Runoff from orchards; Runoff from glass and electronics production waste	ppb	10	MCL	1/1	0.027	Yes	0/1	-	Yes	0/1	-	Yes
Barium	Discharge of drilling wastes; Discharge from metal refineries; Erosion of natural deposits	ppb	2,000	MCL	1/1	1.7	Yes	1/1	1.7	Yes	1/1	2.2	Yes
Chromium	Corrosion of galvanized pipes; Erosion of natural deposits; Discharge from metal refineries; Runoff from waste batteries and paints	ppb	100	MCL	1/1	1.5	Yes	1/1	0.55	Yes	1/1	1.2	Yes
Copper	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	1,300	EAL	1/1	21	Yes	1/1	18.7	Yes	1/1	15	Yes
Lead	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	15	EAL	1/1	0.27	Yes	1/1	0.23	Yes	1/1	0.29	Yes
Selenium	Discharge from petroleum and metal refineries; Erosion of natural deposits; Discharge from mines	ppb	50	MCL	1/1	0.70	Yes	1/1	1.3	Yes	1/1	1.3	Yes





				Sample	Period: Jan	uary 2022	Sample Period: June 2022			Sample Period: December 2022			
Contaminant	Typical Source of Contaminant	Units	DOH Project Screening Level	Basis of DOH Screening Level ²	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)
Thallium	Leaching from ore- processing sites; Discharge from electronics, glass, and drug factories	ppb	2.0	MCL	-	ı	1	0/1	-	Yes	1/1	0.076	Yes
Volatile Organic Compounds (VOCs) - ND													
Synthetic Organic Compounds (SOCs) or Semi-Volatile Organic Compounds (SVOCs)													
Bis(2- ethylhexyl)phthalate	Discharge from rubber and chemical factories	ppb	6.0	MCL	0/1	-	Yes	1/1	0.52	Yes	1/1	0.55	Yes

Notes:

- 1. These contaminants are listed whether detected or non-detect (ND) because these are incident specific. All other contaminants are only listed if detected.
- 2. The DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs), previously established environmental action levels (EALs) and incident specific parameters (ISPs).
- 3. These numbers are the minimum and maximum values from all the sample test results. The average (or mathematical mean) includes all sample test results with a detectable contaminant. An average is the sum of the results (excluding non-detects) divided by the total number results with detection only. Acronyms and explanation of terms used in this table are presented on the following pages.
- 4. For more information regarding Total Petroleum Hydrocarbons, refer to the FACT SHEET What Are Petroleum Hydrocarbons?, available online at: https://health.hawaii.gov/about/files/2021/12/21.12.16 What-Are-Petroleum-Hydrocarbons.pdf.
- 5. Total Organic Carbon (TOC) test results report any constituent containing carbon, many of which are naturally occurring and some of which may be man-made. The DOH selected a TOC project screening level of 2,000 ppb under Stage 4. Each exceedance was investigated by reviewing the associated water quality data (e.g., BTEX results, TPH) and the IDWST determined that all TOC exceedances were inconclusive in association with petroleum hydrocarbons. Under the Drinking Water Long Term Monitoring Plan (under review during the LTM Period 3 report for Zone D1), DOH revised the TOC screening level to 4.000 ppb (previously 2.000 ppb).
- 6. Parts per billion (ppb) refers to the amount (or concentration) of a contaminant in the water.
- 7. Cells highlighted in green indicate the water sample results were below DOH Screening Levels.
- 8. On January 30 and February 25, 2022, DOH revised the LTM requirements to include the analysis of free chlorine. Chlorine is typically used as an additive to drinking water for disinfection purposes.
- 9. Per the June 2022 Drinking Water Long-Term Monitoring Plan, the ISP for Total TPHs was changed to 266 ppb (previously it was 211 ppb). The June 2022 Drinking Water Long-Term Monitoring Plan is available online at: https://health.hawaii.gov/about/files/2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-20220823.pdf.





Drinking Water Distribution System Recovery Plan: Stage 5 LTM Period 4 Sampling Results Report for Zone D1

What is the purpose of this Stage 5 LTM Period 4 Sampling Results Report?

This progress report presents the testing results from drinking water samples that have been collected from residences, schools, Child Development Centers, other buildings, and fire hydrants. These samples were collected after the health advisory had been amended and DOH determined drinking water was safe for human consumption. The health advisory was amended after the first four stages of the Drinking Water Distribution System Recovery Plan³ were completed in your zone. The JBPHH PWS #HI0000360 is committed to ensuring tap water is safe for human consumption after residents have returned home.

We are sharing this information with you to keep you updated on your community's water quality.

What was found?

The tables on the previous pages present all contaminants that were detected in drinking water samples that have been collected from residences, schools, Child Development Centers, other buildings, and fire hydrants in your zone during Stage 5 LTM Period 1, LTM Period 2, LTM Period 3, and LTM Period 4. The DOH used multiple standards/criteria (called DOH Project Screening Levels) to assess the safety of the drinking water to include:

- EPA and Hawaii DOH Maximum Contaminant Levels (MCLs) standards for drinking water;
- Previously established Environmental Action Levels (EALs); and
- Incident Specific Parameters (ISPs).

This report together with the data demonstrates that the drinking water in your area (Zone D1) meets U.S. EPA and DOH standards that are applicable to the Navy Water System Incident.

All exceedances of DOH Project Screening Levels are thoroughly reviewed and investigated by the Navy, Army, and DOH, to (1) determine if the exceedance is associated with the JBPHH water distribution system or if it is associated with premise plumbing (i.e., it is localized to a specific faucet) and (2) determine the appropriate course of action to address the exceedance (e.g., re-flushing and replacing a faucet). There were no exceedances of screening levels in drinking water samples collected

14

³ Drinking Water Distribution System Recovery Plan: https://www.cpf.navy.mil/Portals/52/Drinking-Water-Distribution-System-Recovery-Plan.pdf





from residences, schools, Child Development Centers, other buildings, and fire hydrants during LTM Period 1, LTM Period 2, LTM Period 3, or LTM Period 4 for Zone D1.

Total Organic Carbon (TOC) test results report any constituent containing carbon, many of which are naturally occurring and some of which may be man-made. The DOH selected a TOC project screening level of 4,000 parts per billion (ppb) for long term monitoring. Each exceedance is investigated by reviewing the associated water quality data (e.g., Disinfection byproducts and TPH results) for association with petroleum hydrocarbons. No TOC exceedances occurred in LTM Period 1, LTM Period 2, LTM Period 3, or LTM Period 4 for Zone D1.

What contaminants were tested?

Drinking water, including bottled water, can contain at least small amounts of some contaminants. The presence of contaminants does not necessarily indicate that water poses a health risk. More information about contaminants tested can be obtained by calling the Hawaii DOH Safe Drinking Water Branch at 808-586-4258.

In order to ensure that drinking water is safe to drink, EPA and Hawaii DOH regulate the amount of certain contaminants in water provided by public water systems. For this incident, the primary categories of monitored contaminants include volatile organic compounds (VOCs), synthetic organic chemicals (SOCs)/semi-volatile organic compounds (SVOCs), metals, Total Petroleum Hydrocarbons (TPH), and Total Organic Carbon (TOC). A description of these contaminant categories can be found under *Explanation of Terms* located at the end of this report. The full list of contaminants that were tested for this zone are presented in the laboratory reports that are located at: https://jbphh-safewaters.org. For complete information on the interagency response, please visit: https://www.cpf.navy.mil/JBPHH-Water-Updates/.

What happened leading up to the public health advisory being issued?

The Red Hill Bulk Fuel Storage Facility jet fuel spill event was reported to have taken place on November 20, 2021. Subsequent reporting of fuel-like smell or visual sheen in addition to complaints of health issues from ingestion or dermal contact with the Navy and Army system water were received by the Navy and DOH. On November 28, 2021, the Navy reported that a chemical release of petroleum, which is a hazardous substance, entered the JBPHH drinking water distribution system from the Red Hill Shaft source. This release triggered an emergency response and DOH issuance of a public health advisory on November 29, 2021, for the entire JBPHH Public Water System No. HI0000360 (JBPHH System).

The Hawaii DOH, EPA, Navy, and Army formed the Interagency Drinking Water System Team (IDWST) to work on a coordinated effort to restore safe drinking water to all Navy Water System users.





Has the public health advisory been amended or lifted?

The health advisory for Zone D1 was amended on March 1, 2022 but has not been lifted for the entire JBPHH System. The amendment to the health advisory was based on the results of extensive flushing, sampling (10% of buildings), and testing activities performed in Zone D1. The IDWST evaluated multiple lines of evidence to determine whether or not drinking water was safe for consumption. DOH determined that the water in Zone D1 was safe and residents/occupants could use their tap water for all purposes include drinking, cooking, oral hygiene, and consumption by pets. LTM of drinking water will be performed to ensure drinking water remains safe for all residents and occupants of JBPHH. If new information becomes available that indicates contaminants are present in the drinking water that poses a threat to public health, additional investigation may be required.

Where does our water come from?

The source of water for the Navy Water System now comes from the Navy Waiawa Shaft, which was not impacted by the release of Jet Fuel (JP-5) that occurred at Red Hill in late November 2021. The Waiawa Shaft has been sampled, and EPA and the DOH confirmed that it meets all federal and state drinking water standards. The Waiawa Shaft will be sampled (in subsequent sampling rounds) in accordance with EPA and the DOH requirements.

What has the IDWST done to clean the drinking water distribution system?

The IDWST evaluated multiple options for cleaning the Navy drinking water distribution system and determined that high-volume flushing of the Navy drinking water distribution system (all water mains/laterals/buildings) with 3 to 5 volumes of clean water from the Waiawa Shaft, followed by extensive testing to confirm that flushing worked, would restore safe drinking water to all Navy Water System users.

When was Long-Term Monitoring (LTM) water quality sampling conducted in Zone D1?

Between March 15, 2022 and April 1, 2022, drinking water samples were collected from residences, schools, Child Development Centers, other buildings, and fire hydrants in Zone D1 for LTM Period 1.

Between April 11, 2022 and April 19, 2022, drinking water samples were collected from residences, schools, Child Development Centers, other buildings, and fire hydrants in Zone D1 for LTM Period 2.

Between May 10, 2022 and May 19, 2022, drinking water samples were collected from residences, schools, Child Development Centers, other buildings, and fire hydrants in Zone D1 for LTM Period 3.





Between June 23, 2022 and November 4, 2022, drinking water samples were collected from residences, schools, Child Development Centers, other buildings, and fire hydrants in Zone D1 for LTM Period 4.

Where were samples taken?

Per the IDWST approved sampling plan, ten percent (10%) of all homes and buildings within Zone D1 were sampled. These houses/buildings will be geographically distributed throughout the area to provide spatial coverage along the water supply line. In addition, the list of houses/buildings may be augmented based on additional information (e.g., houses/buildings where occupants reported specific health impacts, houses/buildings that are referred to the team by medical providers) may also be sampled.

Where can I get more information about the potential health effects associated with these contaminants?

Hawaii Department of Health (DOH)
https://health.hawaii.gov/about/navy-water-system-quality-updates/.
Call the DOH Safe Drinking Water Branch at 808-586-4258

US Environmental Protection Agency (EPA)

https://www.epa.gov/ground-water-and-drinking-water/forms/online-form-epas-office-ground-water-and-drinking-water.

Call EPA Region 9's Environmental Information Center at 1-866-372-9378





Explanation of Terms and Acronyms used in this Report

Action Level (AL). This AL is for Lead and Copper. The AL is a measure of the effectiveness of the corrosion control treatment in water systems. The AL is not a standard for establishing a safe level of lead or copper. The AL is the point at which certain provisions of the proposed standards must be initiated.

Contaminant. Contaminant is any physical, chemical, biological, or radiological substance or matter in water, and can be either healthy or unhealthy, depending on the particular substance and concentration. It could also be a physical parameter monitored such as pH or temperature.

DOH. Hawaii Department of Health

EPA. U.S. Environmental Protection Agency

Incident Specific Parameter (ISP). To more comprehensively monitor and respond to this specific petroleum contamination of drinking water, the DOH identified contaminants that require additional action prior to amending the Health Advisory. The ISPs are used as a line of evidence to evaluate the data generated in each zone during the investigation conducted by the IDWST.

Maximum Contaminant Level (MCL). An MCL is the maximum permissible level of a contaminant in water which is delivered to any user of a public water system. The MCL is set to protect the public from acute and chronic health risks associated with consuming water containing these contaminants.

Metals. Metals are not derived from living sources and in general do not contain carbon. Metals include antimony, arsenic, asbestos, barium, beryllium, cadmium, chromium, copper, cyanide, fluoride, lead, mercury, nitrate, nitrite, selenium, and thallium. These contaminants get into drinking water supplies through industrial discharge or spills, erosion of natural deposits, corrosion, sewage discharge, fertilizer runoff, and other sources.

ND. Non-Detect

Project Specific Screening Level. DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs) previously established environmental action levels (EALs) and incident specific parameters (ISPs).

Synthetic Organic Compounds (SOCs)/Semi-Volatile Organic Compounds (SVOCs). SOCs and SVOCs may be used interchangeably and are man-made, organic





(carbon-based) chemicals that are less volatile than Volatile Organic Contaminants (VOCs). They are used as pesticides, defoliants, fuel additives, and as ingredients for other organic chemicals.

DOH Environmental Action Level (EAL). The DOH Environmental Action Levels (EALs) are concentrations of contaminants in drinking water and other media (e.g., soil, soil gas, and groundwater) below which the contaminants are assumed to not pose a significant threat to human health or the environment. Exceeding these EAL does not necessarily indicate that contamination at the site poses environmental hazards but generally warrants additional investigation.

Total Petroleum Hydrocarbons (TPH). TPH is a term used to describe a large family of several hundred chemical compounds that come from crude oil. Crude oil is used to make petroleum products, which can contaminate the environment. TPH is comprised of detected results from TPH-Gasoline, TPH-Diesel, and TPH-Oil.

Total Organic Carbon (TOC). TOC is naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources.

Free Chlorine. Chlorine is added to drinking water as part of the treatment process. Adding chlorine is the most common way to disinfect drinking water. Disinfection kills bacteria, viruses, and other microorganisms that could cause disease or illness. Chlorine is effective and continues to keep the water safe as it travels from the treatment plant to the consumer's tap. Chlorine measurements provide another line-of-evidence for evaluating drinking water quality.

Total Trihalomethanes (TTHM). TTHM is the sum of the concentration in milligrams per liter of the trihalomethane compounds (trichloromethane [chloroform], dibromochloromethane, bromodichloromethane and tribromomethane [bromoform]).

Units. A unit is the concentration of contaminant found in the water. For this report, the units are expressed in U.S. Standard Units.

U.S. Standard Unit (Name)	Acronym	Equivalent International System of Units (Name)	Acronym
parts per billion	ppb	micrograms per Liter	μg/L

Volatile Organic Compounds (VOCs). VOCs are a class of chemicals that contain carbon and evaporate, or volatilize, easily into air at room temperature. VOCs are found in a variety of commercial, industrial, and residential products, including gasoline, solvents, cleaners, degreasers, paints, inks, dyes and pesticides.