

Joint Base Pearl Harbor-Hickam (JBPHH) Public Water System No. HI0000360 & Aliamanu Military Reservation (AMR) Public Water System No. HI0000337

Drinking Water Distribution System Recovery Plan: Stage 5 Long-Term Monitoring (LTM) Period 4 Sampling Results Report for Zone H3 8 December 2022



Neighborhoods included in Zone H3: Red Hill Housing




EXECUTIVE SUMMARY FOR ZONE H3

This report documents the results of long-term monitoring (LTM) testing for Zone H3. We are sharing this information with you to keep you updated on your water quality.

This LTM testing was performed after the November 29, 2021 Public Health Advisory for the JBPHH Public Water System¹ for Zone H3 was amended by the Hawaii Department of Health (DOH) on March 11, 2022. The amended health advisory for Zone H3 can be found online at: <u>https://jbphh-safewaters.org</u>. The amended health advisory states that tap water can be used for all purposes including drinking, cooking, oral hygiene, and consumption by pets. The health advisory was amended based on a final review of all sample data and how the Navy water system maintains operations to ensure safe drinking water. Test results that led to the advisory amendment are summarized in the Stage 4 Residential Sampling Report. After the health advisory was revised, residents were informed that they can safely use their water for all purposes.

Zone H3 has been thoroughly flushed, sampled, and tested. This zone has completed each stage (i.e., Stage 1 - Distribution System Flushing through Stage 4 - Building Sampling) outlined in the Drinking Water Distribution System Recovery Plan.² Based on the samples collected and tested from water mains (Stage 2) residences and buildings (Stage 4), this zone meets the U.S. Environmental Protection Agency (EPA) and DOH drinking water standards used during this investigation. Zone H3 is now in the LTM phase (a.k.a., Stage 5), which is described below. For additional information on the Stage 2, Stage 4, and Stage 5 sample results by zone, please visit: https://jbphh-safewaters.org.

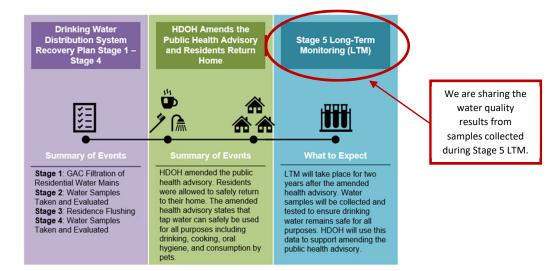

¹ Public Health Advisory for the JBPHH Public Water System: <u>https://health.hawaii.gov/news/files/2021/11/21-165-DOH-advises-Navy-water-system-consumers-not-to-drink-consume-tap-water.pdf</u>

² The Drinking Water Distribution System Recovery Plan was developed and approved by the Interagency Drinking Water System Team (IDWST). The DOH, EPA, Navy, and Army formed the IDWST to restore safe drinking water to all Navy Water System users. The JBPHH PWS #HI0000360 and ARM PWS #HI0000337 will continue the work of the IDWST by working to restore consumer confidence by ensuring tap water continues to be safe for human consumption (e.g., drinking, cooking, and oral hygiene).



Long-Term Monitoring

LTM will be performed as outlined in the Final Drinking Water Sampling and Long-Term Monitoring Plan, dated June 2022. LTM will take place for two years after the date of the amended health advisory. The purpose of LTM is to ensure tap water continues to be safe for human consumption (e.g., drinking, cooking, and oral hygiene). All required samples under the LTM have met the requirements for this Period (Period 4). The results of any additionally requested samples after the completion date (see table below) will be included under the Sampling Results for Zone H3 on the Safe Water website. Residents/occupants will be notified if and when their house/building is scheduled to be sampled. Below is the schedule for LTM in Zone H3.

Sampling Event ¹	Summary of Sampling Activities	Completion Date ²
Period 1	5% of houses/buildings (minimum of 5 houses/buildings)	March 22 – March 24, 2022
Period 2	5% of houses/buildings (minimum of 5 houses/buildings)	April 15 – April 29, 2022
Period 3	5% of houses/buildings (minimum of 5 houses/buildings)	May 24 – June 7, 2022
Period 4	10% of houses/buildings	July 6 – October 28, 2022
Period 5	10% of houses/buildings	June 2023
Period 6	10% of houses/buildings	December 2023
Period 7	10% of houses/buildings	March 2024

LTM Schedule for Zone H3

Notes:

¹ Sampling events are scheduled based on the amount of time (months) since the DOH health advisory was amended for this zone.

² Completion dates are estimated based on the date the DOH health advisory was amended for this zone.



Tables Included in this Stage 5 Sampling Results Report for Zone H3

Table	Description Page	e
Table 1-1.	Contaminants Detected in Drinking Water Samples Collected from Residences in Zone H3	1
Table 1-2.	Contaminants Detected in Drinking Water Samples Collected from Schools in Zone H3	
Table 1-3.	Contaminants Detected in Drinking Water Samples Collected from Child Development Centers in Zone H3	3
Table 1-4.	Contaminants Detected in Drinking Water Samples Collected from Other Buildings in Zone H3	4
Table 1-5.	Contaminants Detected in Drinking Water Samples Collected from Fire Hydrants in Zone H3	6
Table 1-6.	Contaminants Detected in Drinking Water Samples Collected from JBPHH's Source Water (Waiawa Shaft - Post Chlorination)	8

	minants Detected in D				Stage 4	Sampling nmary	Stage 5 L	TM Sampling ry Period 1	Stage 5 L	TM Sampling ry Period 2		TM Sampling ry Period 3		TM Sampling ry Period 4		M Sampling y Period 5		M Sampling y Period 6		TM Sampling ry Period 7
			DOH Project	Basis of DOH	Februa	ary 2022	Apr	il 2022	Ма	y 2022	Jun	e 2022	Decen	nber 2022	June	2023	Decem	ber 2023	Maro	ch 2024
Contaminant	Typical Source of Contaminant	Units	Screening Level	Screening Level ²	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³								
Contaminants of Conce	ern ¹					-	-		-	-	-	-	-	-	-		-		-	-
Benzene	Discharge from factories; Leaching from gas storage tanks and landfills	ppb ⁶	5.0	MCL	0/50	-	0/24	-	0/20	-	0/21	-	0/40	-						
Ethylbenzene	Discharge from petroleum refineries	ppb	700	MCL	0/50	-	0/24	-	0/20	-	0/21	-	0/40	-						
Toluene	Discharge from petroleum factories	ppb	1,000	MCL	0/50	-	0/24	-	0/20	-	0/21	-	0/40	-						
Xylenes (total)	Discharge from petroleum factories; Discharge from chemical factories	ppb	10,000	MCL	0/50	-	0/24	-	0/20	-	0/21	-	0/40	-						
1-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also, present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites.	ppb	10	EAL	0/50	-	0/24	-	0/20	-	0/21	-	0/40	-						
2-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also used to make vitamin K; and is present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	EAL	0/50	-	0/24	-	0/20	-	0/21	-	0/40	-	collected after the hea was ameno will be repor Period 5	ted in a LTM	collected 21 the health a amended. F reported in a 6 Sampli	nples will be months after advisory was lesults will be a LTM Period ng Results port.	collected after the h was amer will be re LTM Perio	mples will be 1 24 months ealth advisory ided. Results eported in a d 7 Sampling is Report.
Naphthalene	Naphthalene is found in coal tar or crude oil and is used in the manufacture of plastics, resins, fuels, and dyes, and as a fumigant	ppb	17	EAL	0/50	-	0/24	-	0/20	-	0/21	-	0/40	-						
Total TPH ⁴	TPH is petroleum and can contaminate drinking water through spills and other releases into the environment	ppb	266 ⁹	ISP	1/50	ND - 180 (180)	9/24	ND - 87 (64)	0/20	-	7/21	ND - 130 (73)	9/40	ND - 101 (62)						
Total Organic Carbon (TOC)⁵	Naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources	ppb	4,000	ISP	27/50	ND - 7480 (2025.2)	6/24	ND - 370 (250)	1/20	ND - 220 (220)	0/21	-	0/40	-						
Free Chlorine (Field Test) ⁸	Water additive used to control microbes	ppb	4,000	MCL	-	-	24/24	30 - 660 (412)	19/19	50 - 670 (337.4)	19/19	30 - 650 (279)	38/38	60 - 760 (450)						
Metals			<u> </u>	<u> </u>															I	
Antimony	Discharge from petroleum refineries; fire retardants; ceramics; electronics; solder	ppb	6.0	MCL	0/50	-	2/24	ND - 0.11 (0.11)	0/20	-	2/21	ND - 0.18 (0.16)	0/40	-	These sam	nples will be	These san	nples will be	These sa	mples will be
Arsenic	Erosion of natural deposits; Runoff from orchards; Runoff from glass and electronics production wastes	ppb	10	MCL	0/50	-	0/24	-	0/20	-	6/21	ND - 0.80 (0.63)	0/40	-	collected after the hea was amend will be repor	15 months alth advisory led. Results ted in a LTM	collected 21 the health a amended. F reported in a	months after advisory was esults will be a LTM Period	collected after the he was amer will be re	24 months ealth advisory ded. Results eported in a
Barium	Discharge of drilling wastes; Discharge from metal refineries; Erosion of natural deposits	ppb	2,000	MCL	50/50	2.3 - 4.1 (2.8)	24/24	3.9 - 8.1 (6.3)	20/20	5.5 - 7.5 (6.8)	21/21	3.9 - 4.5 (4.2)	40/40	2.0 - 4.4 (3.0)	Period 5 Results	Sampling Report.		ng Results port.	LTM Peric Result	d 7 Sampling s Report.

Table 1-1. Contaminants Detected in Drinking Water Samples Collected from Residences in Zone H3



Chromium	Discharge from steel and pulp mills; Erosion of natural deposits	ppb	100	MCL	48/50	ND - 4.0 (1.8)	0/24	-	0/20	-	0/21	-	19/40	ND - 1.5 (1.2)			
Copper	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	1,300	MCL	50/50	5.4 - 101 (32)	24/24	1.2 - 13 (5.5)	20/20	5.7 - 104 (40)	21/21	5.0 - 122 (29)	40/40	3.5 - 175 (36)			
Lead	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	15	MCL	43/50	ND - 4.1 (0.49)	9/24	ND - 1.9 (0.38)	19/20	ND - 3.7 (0.58)	18/21	ND - 1.0 (0.46)	35/40	ND - 7.9 (0.70)	These samples will be collected 15 months	These samples will be collected 21 months after	These samples will be collected 24 months
Mercury	Erosion of natural deposits; Discharge from refineries and factories; Runoff from landfills; Runoff from cropland	ppb	2.0	MCL	3/50	ND - 0.078 (0.064)	0/24	-	0/20	-	0/21	-	12/40	ND - 0.047 (0.039)	after the health advisory was amended. Results will be reported in a LTM Period 5 Sampling	the health advisory was amended. Results will be reported in a LTM Period 6 Sampling Results	after the health advisor was amended. Results will be reported in a LTM Period 7 Sampling
Selenium	Discharge from petroleum and metal refineries; Erosion of natural deposits; Discharge from mines	ppb	50	MCL	2/50	ND - 1.6 (1.5)	0/24	-	4/20	ND - 0.78 (0.61)	17/21	ND - 2.6 (1.2)	6/40	ND – 1.0 (0.51)	Results Report.	Report.	Results Report.
Thallium	Leaching from ore-processing sites; Discharge from electronics, glass, and drug factories	ppb	2.0	MCL	4/50	ND - 0.12 (0.093)	1/24	ND - 0.051 (0.051)	1/20	ND - 0.068 (0.068)	0/21	-	3/40	ND - 0.12 (0.074)			
Volatile Organic Compo	unds (VOCs)					-	_	-									
1,2-Dichloroethane	Discharge from industrial chemical factories	ppb	5.0	MCL	1/50	ND - 0.13 (0.13)	0/24	-	0/20	-	0/21	-	0/40	-			
1,4-Dichlorobenzene	Discharge from industrial chemical factories	ppb	75	MCL	0/50	-	0/24	-	0/20	-	0/21	-	1/40	ND - 0.53 (0.53)			
Total Haloacetic acids (sum of mono-, di-, trichloroacetic acids and mono- and dibromoacetic acids)	By-product of drinking water disinfection	ppb	60	MCL	-	-	5/24	ND - 7.0 (2.4)	0/20	-	1/21	ND - 2.2 (2.2)	7/40	ND - 1.2 (0.90)	These samples will be collected 15 months after the health advisory was amended. Results will be reported in a LTM Period 5 Sampling	These samples will be collected 21 months after the health advisory was amended. Results will be reported in a LTM Period 6 Sampling Results	These samples will be collected 24 months after the health advisor was amended. Results will be reported in a LTM Period 7 Samplin
Total trihalomethanes (sum of chloroform, bromoform, bromodichloromethane, and di- bromochloromethane)	By-product of drinking water disinfection	ppb	80	MCL	-	-	24/24	1.7 - 29 (5.3)	19/20	ND - 13 (3.0)	21/21	0.56 - 15 (4.3)	39/40	ND - 17 (2.8)	Results Report.	Report.	Results Report.
Synthetic Organic Comp	oounds (SOCs) or Semi-Volatile	Organic (Compounds ((SVOCs)	• •												
Benzo(a)pyrene	Leaching from linings of water storage tanks and distribution lines	ppb	0.20	MCL	0/50	-	1/24	ND - 0.019 (0.019)	0/20	-	0/21	-	0/40	-	These samples will be collected 15 months after the health advisory	These samples will be collected 21 months after the health advisory was	These samples will be collected 24 months after the health advisory
Bis(2- ethylhexyl)phthalate	Discharge from rubber and chemical factories	ppb	6.0	MCL	0/50	-	1/24	ND - 0.62 (0.62)	6/20	ND - 0.87 (0.60)	0/21	-	0/40	after was will b 0 - Pe	was amended. Results will be reported in a LTM Period 5 Sampling Results Report.	amended. Results will be reported in a LTM Period 6 Sampling Results Report.	was amended. Results will be reported in a LTM Period 7 Sampling Results Report.

1. These contaminants are listed whether detect or non-detect (ND) because these are incident specific. All other contaminants are only listed if detected.

2. The DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs), previously established environmental action levels (EALs) and incident specific parameters (ISPs).

3. These numbers are the minimum and maximum values from all the sample test results. The average (or mathematical mean) includes all sample test results with a detectable contaminant. An average is the sum of the results (excluding non-detects) divided by the total number results with detection only. Acronyms and explanation of terms used in this table are presented on the following pages.

4. For more information regarding Total Petroleum Hydrocarbons, refer to the FACT SHEET What Are Petroleum Hydrocarbons?, available online at: https://health.hawaii.gov/about/files/2021/12/21.12.16 What-Are-Petroleum-Hydrocarbons.pdf.

5. Total Organic Carbon (TOC) test results report any constituent containing carbon, many of which are naturally occurring and some of which may be man-made. The DOH selected a TOC project screening level of 2,000 ppb under Stage 4. Each exceedance was investigated by reviewing the associated water quality data (e.g., BTEX results, TPH) and the IDWST determined that all TOC exceedances were inconclusive in association with petroleum hydrocarbons. Under review during the LTM Period 3 report for Zone H3), DOH revised the TOC screening level to 4,000 ppb (previously 2,000 ppb).

6. Parts per billion (ppb) refers to the amount (or concentration) of a contaminant in the water.

7. Cells highlighted in green indicate the water sample results were below DOH Screening Levels.

8. On January 30 and February 25, 2022, DOH revised the LTM requirements to include the analysis of free chlorine. Chlorine is typically used as an additive to drinking water for disinfection purposes.

9. Per the June 2022 Drinking Water Long-Term Monitoring Plan, the ISP for Total TPHs was changed to 266 ppb (previously it was 211 ppb). The June 2022 Drinking Water Long-Term Monitoring Plan, it uses 211 ppb). The June 2022 Drinking Water Long-Term Monitoring Plan is available online at: https://health.hawaii.gov/about/files/2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-20220823.pdf



 Table 1-2. Contaminants Detected in Drinking Water Samples Collected from Schools in Zone H3

There are no Schools in this zone.

 Table 1-3. Contaminants Detected in Drinking Water Samples Collected from Child Development Centers in Zone H3

There are no Child Development Centers in this zone.



						Sampling nmary		TM Sampling ry Period 1		M Sampling Y Period 2		M Sampling y Period 3		M Sampling y Period 4		M Sampling y Period 5	Stage 5 LT Summary	VI Sampling / Period 6		M Sampling y Period 7
			рон	Basis of	Febru	ary 2022	Apr	il 2022	Мау	/ 2022	June	e 2022	Decem	ber 2022	June	2023	Decemi	oer 2023	Marc	h 2024
Contaminant	Typical Source of Contaminant	Units	Project Screening Level	DOH Screening Level ²	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³								
Contaminants of Concern ¹	<u> </u>		1	ł	,		,	1	1	1		1	•		1					ł
Benzene	Discharge from factories; Leaching from gas storage tanks and landfills	ppb ⁶	5.0	MCL	-	-	0/1	-	-	-	-	-	-	-						
Ethylbenzene	Discharge from petroleum refineries	ppb	700	MCL	-	-	0/1	-	-	-	-	-	-	-						
Toluene	Discharge from petroleum factories	ppb	1,000	MCL	-	-	0/1	-	-	-	-	-	-	-						
Xylenes (total)	Discharge from petroleum factories; Discharge from chemical factories	ppb	10,000	MCL	-	-	0/1	-	-	-	-	-	-	-						
1-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also, present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites.	ppb	10	EAL	-	-	0/1	-	-	-	-	-	-	-						
2-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also used to make vitamin K; and is present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	EAL	-	-	0/1	-	-	-	-	-	-	-	collected after the he was amend will be re LTM Period	led. Results ported in a I 5 Sampling	after the hea was ameno will be repor Period 6	21 months alth advisory led. Results ted in a LTM Sampling	collected after the he was amend will be re LTM Period	nples will be 24 months alth advisory ded. Results ported in a d 7 Sampling
Naphthalene	Naphthalene is found in coal tar or crude oil and is used in the manufacture of plastics, resins, fuels, and dyes, and as a fumigant	ppb	17	EAL	-	-	0/1	-	-	-	-	-	-	-	- Results	Report.	Results	кероп.	Result	s Report.
Total TPH ^₄	TPH is petroleum and can contaminate drinking water through spills and other releases into the environment	ppb	266 ⁹	ISP	-	-	1/1	74	-	-	-	-	-	-						
Total Organic Carbon (TOC) ⁵	Naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources	ppb	4,000	ISP	-	-	1/1	680	-	-	-	-	-	-						
Free Chlorine (Field Test) ⁸	Water additive used to control microbes	ppb	4,000	MCL	-	-	1/1	470	-	-	-	-	-	-						
Metals		<u> </u>	1	<u> </u>		I			I				<u> </u>		1					
Barium	Discharge of drilling wastes; Discharge from metal refineries; Erosion of natural deposits	ppb	2,000	MCL	-	-	1/1	5.5	-	-	-	-	-	-			hs collected 21 months			nples will be
Copper	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	1,300	MCL	-	-	1/1	12	-	-	-	-	-	-	These samples will be collected 15 months after the health advisory		after the hea was ameno will be repor	alth advisory ed. Results ted in a LTM	after the he was ameno will be re	24 months alth advisory ded. Results ported in a
Lead	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	15	MCL	-	-	1/1	0.55	-	-	-	-	-	-		5 Sampling Report.		Sampling Report.	LIM Perioc Results	d 7 Sampling s Report.



Volatile Organic Compour	nds (VOCs)														
Total trihalomethanes (sum of chloroform, bromoform, bromodichloromethane, and di- bromochloromethane)	By-product of drinking water disinfection	ppb	80	MCL	-	-	1/1	3.0	-	-	-	-	-	-	Th c afte wa v LT
Synthetic Organic Compo	ounds (SOCs) or Semi-Volatile Organ	nic Comp	ounds (SVO	Cs) - ND											

Notes:

- 1. These contaminants are listed whether detect or non-detect (ND) because these are incident specific. All other contaminants are only listed if detected.
- 2. The DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs), previously established environmental action levels (EALs) and incident specific parameters (ISPs).
- 3. These numbers are the minimum and maximum values from all the sample test results. The average (or mathematical mean) includes all sample test results with a detectable contaminant. An average is the sum of the results (excluding non-detects) divided by the total number results with detection only. Acronyms and explanation of terms used in this table are presented on the following pages.
- 4. For more information regarding Total Petroleum Hydrocarbons, refer to the FACT SHEET What Are Petroleum Hydrocarbons?, available online at: https://health.hawaii.gov/about/files/2021/12/21.12.16 What-Are-Petroleum-Hydrocarbons.pdf
- 5. Total Organic Carbon (TOC) test results report any constituent containing carbon, many of which are naturally occurring and some of which may be man-made. The DOH selected a TOC project screening level of 2,000 ppb under Stage 4. Each exceedance was investigated by reviewing the associated water quality data (e.g., BTEX results, TPH) and the IDWST determined that all TOC exceedances were inconclusive in association with petroleum hydrocarbons. Under review during the LTM Period 3 report for Zone H3), DOH revised the TOC screening level to 4,000 ppb (previously 2,000 ppb).
- 6. Parts per billion (ppb) refers to the amount (or concentration) of a contaminant in the water.
- 7. Cells highlighted in green indicate the water sample results were below DOH Screening Levels.
- 8. On January 30 and February 25, 2022, DOH revised the LTM requirements to include the analysis of free chlorine. Chlorine is typically used as an additive to drinking water for disinfection purposes.
- 9. Per the June 2022 Drinking Water Long-Term Monitoring Plan, the ISP for Total TPHs was changed to 266 ppb (previously it was 211 ppb). The June 2022 Drinking Water Long-Term Monitoring Plan is available online at: https://health.hawaii.gov/about/files/2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-20220823.pdf.



These samples will be collected 15 months after the health advisory was amended. Results will be reported in a LTM Period 5 Sampling Results Report.

These samples will be collected 21 months after the health advisory was amended. Results will be reported in a LTM Period 6 Sampling Results Report.

These samples will be collected 24 months after the health advisory was amended. Results will be reported in a LTM Period 7 Sampling Results Report.

					•	Sampling nmary		TM Sampling ry Period 1		TM Sampling ry Period 2		M Sampling Period 3		M Sampling y Period 4	•	ΓM Sampling ry Period 5	Stage 5 LT Summary	M Sampling / Period 6		TM Sampling ry Period 7
			DOH	Basis of	Febru	ary 2022	Apr	il 2022	Ма	y 2022	Jun	e 2022	Decem	ber 2022	Jun	e 2023	Decem	ber 2023	Marc	ch 2024
Contaminant	Typical Source of Contaminant	Units	Project Screening Level	DOH Screening Level ²	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³	No. of Detects out of Samples	Minimum - Maximum (Average) ³								
Contaminants of Cond	cern ¹																			
Benzene	Discharge from factories; Leaching from gas storage tanks and landfills	ppb ⁶	5.0	MCL	0/3	-	0/3	-	0/4	-	0/3	-	0/4	-						
Ethylbenzene	Discharge from petroleum refineries	ppb	700	MCL	0/3	-	0/3	-	0/4	-	0/3	-	0/4	-						
Toluene	Discharge from petroleum factories	ppb	1,000	MCL	0/3	-	0/3	-	0/4	-	0/3	-	0/4	-						
Xylenes (Total)	Discharge from petroleum factories; Discharge from chemical factories	ppb	10,000	MCL	0/3	-	0/3	-	0/4	-	0/3	-	0/4	-						
1-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also, present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	EAL	0/3	-	0/3	-	0/4	-	0/3	-	0/4	-						
2-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also used to make vitamin K; and is present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	EAL	0/3	-	0/3	-	0/4	-	0/3	-	0/4	-	after the he was amen will be repo Period 5		collected after the he was amend	ded. Results	collected after the he was amen	mples will be 1 24 months ealth advisory ided. Results
Naphthalene	Naphthalene is found in coal tar or crude oil and is used in the manufacture of plastics, resins, fuels, and dyes, and as a fumigant	ppb	17	EAL	0/13	-	0/3	-	0/4	-	0/3	-	0/4	-	after the hea was ameno will be repor Period 5 Results		Period 6	rted in a LTM Sampling Report.	Period 7	orted in a LTM 7 Sampling ts Report.
Total TPH ⁴	TPH is petroleum and can contaminate drinking water through spills and other releases into the environment	ppb	266 ¹⁰	ISP	1/6	ND - 99 (99)	0/3	-	0/4	-	0/3	-	4/4	53 - 64 (60)						
Total Organic Carbon (TOC) ⁵	Naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources	ppb	4,000	ISP	1/3	ND - 265 (265)	1/3	ND - 400 (400)	0/4	-	0/3	-	0/4	-						
Free Chlorine (Field Test) ⁹	Water additive used to control microbes	ppb	4000	ISP	-	-	-	-	3/3	80 - 430 (297)	3/3	400 - 520 (457)	3/3	540 - 750 (637)						
Metals						•													•	
Antimony	Discharge from petroleum refineries; fire retardants; ceramics; electronics; solder	ppb	6	MCL	1/3	ND - 0.19 (0.19)	0/3	-	0/4	-	0/3	-	2/4	ND - 0.15 (0.14)	(0.14)					
Arsenic	Erosion of natural deposits; Runoff from orchards; Runoff from glass and electronics production wastes	ppb	10	MCL	3/3	0.3 - 0.45 (0.37)	0/3	-	0/4	-	0/3	-	0/4	-	collected after the he was amen	mples will be I 15 months ealth advisory ided. Results	collected after the he was amend		collected after the he was amen	mples will be d 24 months ealth advisory ided. Results
Barium	Discharge of drilling wastes; Discharge from metal refineries; Erosion of natural deposits	ppb	2,000	MCL	3/3	2.5 - 2.5 (2.5)	3/3	6.1 - 6.5 (6.3)	4/4	7.0 - 7.3 (7.2)	3/3	4.5 - 4.6 (4.5)	4/4	2.7 - 2.9 (2.9)	Period 5	orted in a LTM 5 Sampling s Report.	Period 6	rted in a LTM Sampling Report.	Period 7	orted in a LTM 7 Sampling is Report.
Chromium	Discharge from steel and pulp mills; Erosion of natural deposits	ppb	100	MCL	3/3	1.5 - 1.6 (1.5)	0/3	-	0/4	-	0/3	-	0/4	-						

Table 1.5. Contaminants Detected in Drinking Water Samples Collected from Fire Hydrants in Zone H3



Copper	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	1,300	MCL	3/3	5.4 - 14.5 (10)	3/3	1.3 - 12.7 (5.2)	4/4	2.5 - 4.5 (3.8)	3/3	3.9 - 26 (12)	_11	_11			
Lead	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	15	MCL	3/3	0.54 - 2.2 (1.3)	3/3	0.27 - 1.8 (0.85)	4/4	0.51 - 1.3 (1.1)	3/3	0.56 - 3.9 (1.8)	_11	_11	These samples will be collected 15 months after the health advisory	These samples will be collected 21 months after the health advisory	These samples will be collected 24 months after the health advisory
Mercury	Erosion of natural deposits; Discharge from refineries and factories; Runoff from landfills; Runoff from cropland	ppb	2	MCL	0/3	-	0/3	-	0/4	-	1/3	ND - 0.028 (0.028)	0/4	-	was amended. Results	was amended. Results will be reported in a LTM Period 6 Sampling Results Report.	was amended. Results will be reported in a LTM Period 7 Sampling Results Report.
Selenium	Discharge from petroleum and metal refineries; Erosion of natural deposits; Discharge from mines	ppb	50	MCL	3/3	1.5 - 2.2 (1.9)	0/3	-	3/4	ND - 0.48 (0.40)	3/3	1.5 - 2.9 (2.0)	1/4	ND - 0.33 (0.33)			
Volatile Organic Comp	oounds (VOCs)	<u>.</u>		1													
Total Haloacetic acids (sum of mono-, di-, trichloroacetic acids and mono- and dibromo acetic acids)	By-product of drinking water disinfection	ppb	60	MCL	-	-	0/3	-	0/4	-	0/3	-	2/4	ND - 0.53 (0.53)		These samples will be collected 21 months after the health advisory	These samples will be collected 24 months after the health advisory
Total Trihalomethanes	By-product of drinking water disinfection	ppb	80	MCL	-	-	3/3	2.3 - 2.9 (2.6)	4/4	1.5 - 1.8 (1.7)	3/3	1.5 - 2.0 (1.7)	4/4	2.4 - 2.5 (2.5)	was amended. Results will be reported in a LTM Period 5 Sampling Results Report.	was amended. Results will be reported in a LTM Period 6 Sampling Results Report.	was amended. Results will be reported in a LTM Period 7 Sampling Results Report.
Synthetic Organic Con	npounds (SOCs) or Semi-Volatile O	rganic C	ompounds (SVOCs)	<u> </u>										Į		
Benzyl butyl phthalate	Discharge from chemical factories; Used in the manufacturing of plastics.	ppb	_7	_7	3/10	ND - 1.3 (1.1)	-	-	-	-	-	-	-	-	These samples will be	These samples will be	These samples will be
di-n-Octyl phthalate	Discharge from chemical factories; Used in the manufacturing of plastics.	ppb	_7	_7	2/10	ND - 0.22 (0.19)	-	-	-	-	-	-	-	-	collected 15 months after the health advisory was amended. Results will be reported in a LTM	collected 21 months after the health advisory was amended. Results will be reported in a LTM	collected 24 months after the health advisory was amended. Results will be reported in a LTM
Nitrobenzene	Used to manufacturer dyes, pesticides, and synthetic rubbers; Discharge from chemical factories	ppb	_7	_7	1/10	ND - 0.042 (0.042)	-	-	-	-	-	-	-	- after th was ar will be r Perio	Period 5 Sampling Results Report.	Period 6 Sampling Results Report.	Period 7 Sampling Results Report.
lataa																	

Notes

1. These contaminants are listed whether detect or non-detect (ND) because these are incident specific. All other contaminants are only listed if detected.

2. The DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs), previously established environmental action levels (EALs) and incident specific parameters (ISPs).

3. These numbers are the minimum and maximum values from all the sample test results. The average (or mathematical mean) includes all sample test results with a detectable contaminant. An average is the sum of the results (excluding non-detects) divided by the total number results with detection only. Acronyms and explanation of terms used in this table are presented on the following pages.

4. For more information regarding Total Petroleum Hydrocarbons, refer to the FACT SHEET What Are Petroleum Hydrocarbons?, available online at: https://health.hawaii.gov/about/files/2021/12/21.12.16 What-Are-Petroleum-Hydrocarbons.pdf.

Total Organic Carbon (TOC) test results report any constituent containing carbon, many of which are naturally occurring and some of which may be man-made. The DOH selected a TOC project screening level of 2,000 ppb under Stage 4. Each exceedance was investigated by reviewing the associated water quality data 5. (e.g., BTEX results, TPH) and the IDWST determined that all TOC exceedances were inconclusive in association with petroleum hydrocarbons. Under review during the LTM Period 3 report for Zone H3), DOH revised the TOC screening level to 4,000 ppb (previously 2,000 ppb).

6. Parts per billion (ppb) refers to the amount (or concentration) of a contaminant in the water.

7. This contaminant does not have a DOH Screening Level and was only detected at low concentrations. It is not associated with fuels and is not considered a risk to human health associated with the fuel release that occurred at Red Hill in November 2021. 8. Cells highlighted in green indicate the water sample results were below DOH Screening Levels.

9. On January 30 and February 25, 2022, DOH revised the LTM requirements to include the analysis of free chlorine. Chlorine is typically used as an additive to drinking water for disinfection purposes.

10. Per the June 2022 Drinking Water Long-Term Monitoring Plan, the ISP for Total TPHs was changed to 266 ppb (previously it was 211 ppb). The June 2022 Drinking Water Long-Term Monitoring Plan is available online at: https://health.hawaii.gov/about/files/2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-20220823.pdf.

11. Per the June 2022 Drinking Water Long-Term Monitoring Plan, Lead and Copper samples will only be collected from residences, other buildings and the entry points to the distribution system during LTM Months 4-24. The June 2022 Drinking Water Long-Term Monitoring Plan is available online at: https://health.hawaii.gov/about/files/2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-20220823.pdf





Table 1-6. Contaminants Detected in Drinking Water Samples Collected from JBPHH's Source Water (Waiawa Shaft - Post Chlorination)

					Sample	Period: Jan	uary 2022	Samp	le Period: Jι	ine 2022	Sample F	Period: Dece	ember 2022
Contaminant	Typical Source of Contaminant	Units	DOH Project Screening Level	Basis of DOH Screening Level ²	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)
Contaminants of Con	icern ¹												
Benzene	Discharge from factories; Leaching from gas storage tanks and landfills	ppb4	5.0	MCL	0/1	-	Yes	0/1	-	Yes	0/1	-	Yes
Ethylbenzene	Discharge from petroleum refineries	ppb	700	MCL	0/1	-	Yes	0/1	-	Yes	0/1	-	Yes
Toluene	Discharge from petroleum factories	ppb	1,000	MCL	0/1	-	Yes	0/1	-	Yes	0/1	-	Yes
m,p,o-Xylenes	Discharge from petroleum factories; Discharge from chemical factories	ppb	10,000	MCL	0/1	-	Yes	0/1	-	Yes	0/1	-	Yes
1-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also, present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	ISP	0/1	-	Yes	0/1	-	Yes	0/1	-	Yes
2-Methylnaphthalene	Used to make other chemicals such as dyes, and resins; also used to make vitamin K; and is present in cigarette smoke, wood smoke, tar, asphalt, and at some hazardous waste sites	ppb	10	ISP	0/1	-	Yes	0/1	-	Yes	0/1	-	Yes
Naphthalene	Naphthalene is found in coal tar or crude oil and is used in the manufacture of plastics, resins, fuels, and dyes, and as a fumigant	ppb	17	ISP	0/1	-	Yes	0/1	-	Yes	0/1	-	Yes
Total Petroleum Hydrocarbons (TPHs)	TPH is petroleum and can contaminate drinking water through spills and other releases into the environment	ppb	266 ⁹	ISP	0/1	-	Yes ³	0/1	-	Yes	0/1	-	Yes



					Sample	Period: Jan	uary 2022	Samp	le Period: Jι	ine 2022	Sample I	Period: Dece	ember 2022
Contaminant	Typical Source of Contaminant	Units	DOH Project Screening Level	Basis of DOH Screening Level ²	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)
Total Organic Carbon (TOC) ⁴	Naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources	ppb	4,000	ISP	0/1	-	Yes	0/1	-	Yes	0/1	-	Yes
Free Chlorine (Field Test) ⁸	Water Additive	ppb	4,000	MCL	-	-	-	1/1	670	Yes	-	-	-
Metals													
Antimony	Discharge from petroleum refineries; fire retardants; ceramics; electronics; solder	ppb	6.0	MCL	1/1	0.092	Yes	0/1	-	Yes	0/1	-	Yes
Arsenic	Erosion of natural deposits; Runoff from orchards; Runoff from glass and electronics production waste	ppb	10	MCL	1/1	0.027	Yes	0/1	-	Yes	0/1	-	Yes
Barium	Discharge of drilling wastes; Discharge from metal refineries; Erosion of natural deposits	ppb	2,000	MCL	1/1	1.7	Yes	1/1	1.7	Yes	1/1	2.2	Yes
Chromium	Corrosion of galvanized pipes; Erosion of natural deposits; Discharge from metal refineries; Runoff from waste batteries and paints	ppb	100	MCL	1/1	1.5	Yes	1/1	0.55	Yes	1/1	1.2	Yes
Copper	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	1,300	EAL	1/1	21	Yes	1/1	19	Yes	1/1	15	Yes
Lead	Corrosion of household plumbing systems; Erosion of natural deposits	ppb	15	EAL	1/1	0.27	Yes	1/1	0.23	Yes	1/1	0.29	Yes
Selenium	Discharge from petroleum and metal refineries; Erosion of natural deposits; Discharge from mines	ppb	50	MCL	1/1	0.70	Yes	1/1	1.3	Yes	1/1	1.3	Yes



					Sample	Period: Jan	uary 2022	Samp	le Period: Ju	ine 2022	Sample F	Period: Dece	mber 2022
Contaminant	Typical Source of Contaminant	Units	DOH Project Screening Level	Basis of DOH Screening Level ²	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)	No. of Detects out of Samples	Level Detected ³	Meets DOH Screening Level? (Yes / No)
Thallium	Leaching from ore- processing sites; Discharge from electronics, glass, and drug factories	ppb	2.0	MCL	-	-	-	0/1	-	Yes	1/1	0.076	Yes
Volatile Organic Con	npounds (VOCs) - ND												
Synthetic Organic C	ompounds (SOCs) or Semi-\	/olatile C	Organic Com	oounds (SVO	Cs)								
Bis(2- ethylhexyl)phthalate	Discharge from rubber and chemical factories	ppb	6.0	MCL	0/1	-	Yes	1/1	0.52	Yes	1/1	0.55	Yes

Notes:

1. These contaminants are listed whether detect or non-detect (ND) because these are incident specific. All other contaminants are only listed if detected.

- 2. The DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs), previously established environmental action levels (EALs) and incident specific parameters (ISPs).
- 3. These numbers are the minimum and maximum values from all the sample test results. The average (or mathematical mean) includes all sample test results with a detectable contaminant. An average is the sum of the results (excluding non-detects) divided by the total number results with detection only. Acronyms and explanation of terms used in this table are presented on the following pages.
- 4. For more information regarding Total Petroleum Hydrocarbons, refer to the FACT SHEET What Are Petroleum Hydrocarbons?, available online at: https://health.hawaii.gov/about/files/2021/12/21.12.16 What-Are-Petroleum-Hydrocarbons.pdf.
- 5. Total Organic Carbon (TOC) test results report any constituent containing carbon, many of which are naturally occurring and some of which may be man-made. The DOH selected a TOC project screening level of 2,000 ppb under Stage 4. Each exceedance was investigated by reviewing the associated water quality data (e.g., BTEX results, TPH) and the IDWST determined that all TOC exceedances were inconclusive in association with petroleum hydrocarbons. Under the Drinking Water Long Term Monitoring Plan (under review during the LTM Period 3 report for Zone D4), DOH revised the TOC screening level to 4,000 ppb (previously 2,000 ppb).
- 6. Parts per billion (ppb) refers to the amount (or concentration) of a contaminant in the water.
- 7. Cells highlighted in green indicate the water sample results were below DOH Screening Levels.
- 8. On January 30 and February 25, 2022, DOH revised the LTM requirements to include the analysis of free chlorine. Chlorine is typically used as an additive to drinking water for disinfection purposes.
- 9. Per the June 2022 Drinking Water Long-Term Monitoring Plan, the ISP for Total TPHs was changed to 266 ppb (previously it was 211 ppb). The June 2022 Drinking Water Long-Term Monitoring Plan is available online at: https://health.hawaii.gov/about/files/2022/08/JBPHH-Drinking-Water-LTM-Plan-FINAL-20220823.pdf.



Drinking Water Distribution System Recovery Plan: Stage 5 LTM Period 4 Sampling Results Report for Zone H3

What is the purpose of this Stage 5 LTM Period 4 Sampling Results Report?

This progress report presents the testing results from drinking water samples that have been collected from residences, other buildings, and fire hydrants. These samples were collected after the health advisory had been amended and DOH determined drinking water was safe for human consumption. The health advisory was amended after the first four stages of the Drinking Water Distribution System Recovery Plan³ were completed in your zone. The JBPHH PWS #HI0000360 & AMR PWS #HI0000337 are committed to ensuring tap water is safe for human consumption after residents have returned home.

We are sharing this information with you to keep you updated on your community's water quality.

What was found?

The tables on the previous pages present all contaminants that were detected in drinking water samples that have been collected from residences, other buildings, and fire hydrants in your zone during Stage 5 LTM Period 1, LTM Period 2, LTM Period 3, and LTM Period 4. The DOH used multiple standards/criteria (called DOH Project Screening Levels) to assess the safety of the drinking water to include:

- EPA and Hawaii DOH Maximum Contaminant Levels (MCLs) standards for drinking water;
- Previously established Environmental Action Levels (EALs); and
- Incident Specific Parameters (ISPs).

This report together with the data demonstrates that the drinking water in your area (Zone H3) meets U.S. EPA and DOH standards that are applicable to the Navy Water System Incident.

All exceedances of DOH Project Screening Levels are thoroughly reviewed and investigated by the Navy, Army, and DOH, to (1) determine if the exceedance is associated with the JBPHH water distribution system or if it is associated with premise plumbing (i.e., it is localized to a specific faucet) and (2) determine the appropriate course of action to address the exceedance (e.g., re-flushing, replacing a faucet).

There were no exceedances of screening levels in drinking water samples collected from residences, other buildings, and fire hydrants during LTM Period 1, LTM Period 2, LTM Period 3, or LTM Period 4 for Zone H3.

³ Drinking Water Distribution System Recovery Plan: <u>https://www.cpf.navy.mil/Portals/52/Drinking-Water-Distribution-System-Recovery-Plan.pdf</u>



Total Organic Carbon (TOC) test results report any constituent containing carbon, many of which are naturally occurring and some of which may be man-made. The DOH selected a TOC project screening level of 4,000 parts per billion (ppb) for long term monitoring. Each exceedance is investigated by reviewing the associated water quality data (e.g., Disinfection byproducts and TPH results) for association with petroleum hydrocarbons. No TOC exceedances occurred in LTM Period 1, LTM Period 2, LTM Period 3, or LTM Period 4 for Zone H3.

What contaminants were tested?

Drinking water, including bottled water, can contain at least small amounts of some contaminants. The presence of contaminants does not necessarily indicate that water poses a health risk. More information about contaminants tested can be obtained by calling the Hawaii DOH Safe Drinking Water Branch at 808-586-4258.

In order to ensure that drinking water is safe to drink, EPA and Hawaii DOH regulate the amount of certain contaminants in water provided by public water systems. For this incident, the primary categories of monitored contaminants include Volatile Organic Compounds (VOCs), Synthetic Organic Chemicals (SOCs)/Semi-Volatile Organic Compounds (SVOCs), metals, Total Petroleum Hydrocarbons (TPH), and Total Organic Carbon (TOC). A description of these contaminant categories can be found under *Explanation of Terms* located at the end of this report. The full list of contaminants that were tested for this zone are presented in the laboratory reports that are located at: https://jbphh-safewaters.org. For complete information on the interagency response, please visit: https://www.cpf.navy.mil/JBPHH-Water-Updates/.

What happened leading up to the public health advisory being issued?

The Red Hill Bulk Fuel Storage Facility jet fuel spill event was reported to have taken place on November 20, 2021. Subsequent reporting of fuel-like smell or visual sheen in addition to complaints of health issues from ingestion or dermal contact with the Navy and Army system water were received by the Navy and DOH. On November 28, 2021, the Navy reported that a chemical release of petroleum, which is a hazardous substance, entered the JBPHH drinking water distribution system from the Red Hill Shaft source. This release triggered an emergency response and DOH issuance of a public health advisory on November 29, 2021, for the entire JBPHH Public Water System No. HI0000360 (JBPHH System) and the consecutive Aliamanu Military Reservation Public Water System No. HI0000337 (AMR System).

The Hawaii DOH, EPA, Navy, and Army formed the Interagency Drinking Water System Team (IDWST) to work on a coordinated effort to restore safe drinking water to all Navy Water System users.



Has the public health advisory been amended or lifted?

The health advisory for Zone H3 was amended on March 11, 2022 but has not been lifted for the entire JBPHH System. The amendment to the health advisory was based on the results of extensive flushing, sampling (10% of buildings), and testing activities performed in Zone H3. The IDWST evaluated multiple lines of evidence to determine whether or not drinking water was safe for consumption. DOH determined that the water in Zone H3 was safe and residents/occupants could use their tap water for all purposes include drinking, cooking, oral hygiene, and consumption by pets. LTM of drinking water will be performed to ensure drinking water remains safe for all residents and occupants of JBPHH. If new information becomes available that indicates contaminants are present in the drinking water that poses a threat to public health, additional investigation may be required.

Where does our water come from?

The source of water for the Navy Water System now comes from the Navy Waiawa Shaft, which was not impacted by the release of Jet Fuel (JP-5) that occurred at Red Hill in late November 2021. The Waiawa Shaft has been sampled, and EPA and the DOH confirmed that it meets all federal and state drinking water standards. The Waiawa Shaft will be sampled (in subsequent sampling rounds) in accordance with EPA and the DOH requirements.

What has the IDWST done to clean the drinking water distribution system?

The IDWST evaluated multiple options for cleaning the Navy drinking water distribution system and determined that high-volume flushing of the Navy drinking water distribution system (all water mains/laterals/buildings) with 3 to 5 volumes of clean water from the Waiawa Shaft, followed by extensive testing to confirm that flushing worked, would restore safe drinking water to all Navy Water System users.

When was Long-Term Monitoring (LTM) water quality sampling conducted in Zone H3?

Between March 22, 2022 and March 24, 2022, drinking water samples were collected from residences, other buildings, and fire hydrants in Zone H3 for LTM Period 1.

Between April 15, 2022 and April 29, 2022, drinking water samples were collected from residences and fire hydrants in Zone H3 for LTM Period 2.

Between May 24, 2022 and June 7, 2022, drinking water samples were collected from residences and fire hydrants in Zone H3 for LTM Period 3.

Between July 6, 2022 and October 28, 2022, drinking water samples were collected from residences and fire hydrants in Zone H3 for LTM Period 4.



Where were samples taken?

Per the IDWST approved sampling plan, ten percent (10%) of all homes and buildings within Zone H3 were sampled. There are no schools and Child Development Centers in this zone. These houses/buildings were geographically distributed throughout the area to provide spatial coverage along the water supply line. The intention of the LTM plan was to ensure that 65% of all residences and other buildings in the zone are sampled before the completion of the 24 month period. In Zone H3, there is a higher percentage of residences than other buildings and 100% of other buildings have been sampled in this zone. For this reason, there will be an increase of residences sampled to meet the sampling quotas going forward to ensure locations are not repeated and we will continue to sample locations that are representative of the zone. In addition, the list of houses/buildings may be augmented based on additional information (e.g., houses/buildings where occupants reported specific health impacts, houses/buildings that are referred to the team by medical providers) may also be sampled.

Where can I get more information about the potential health effects associated with these contaminants?

Hawaii Department of Health (DOH) <u>https://health.hawaii.gov/about/navy-water-system-quality-updates/</u>. Call the DOH Safe Drinking Water Branch at 808-586-4258

US Environmental Protection Agency (EPA) <u>https://www.epa.gov/ground-water-and-drinking-water/forms/online-form-epas-office-ground-water-and-drinking-water</u>. Call EPA Region 9's Environmental Information Center at 1-866-372-9378



Explanation of Terms and Acronyms used in this Report

Action Level (AL). This AL is for Lead and Copper. The AL is a measure of the effectiveness of the corrosion control treatment in water systems. The AL is not a standard for establishing a safe level of lead or copper. The AL is the point at which certain provisions of the proposed standards must be initiated.

Contaminant. Contaminant is any physical, chemical, biological, or radiological substance or matter in water, and can be either healthy or unhealthy, depending on the particular substance and concentration. It could also be a physical parameter monitored such as pH or temperature.

DOH. Hawaii Department of Health

EPA. U.S. Environmental Protection Agency

Incident Specific Parameter (ISP). To more comprehensively monitor and respond to this specific petroleum contamination of drinking water, the DOH identified contaminants that require additional action prior to amending the Health Advisory. The ISPs are used as a line of evidence to evaluate the data generated in each zone during the investigation conducted by the IDWST.

Maximum Contaminant Level (MCL). An MCL is the maximum permissible level of a contaminant in water which is delivered to any user of a public water system. The MCL is set to protect the public from acute and chronic health risks associated with consuming water containing these contaminants.

Metals. Metals are not derived from living sources and in general do not contain carbon. Metals include antimony, arsenic, asbestos, barium, beryllium, cadmium, chromium, copper, cyanide, fluoride, lead, mercury, nitrate, nitrite, selenium, and thallium. These contaminants get into drinking water supplies through industrial discharge or spills, erosion of natural deposits, corrosion, sewage discharge, fertilizer runoff, and other sources.

ND. Non-Detect

Project Specific Screening Level. DOH uses multiple criteria to assess the safety of the drinking water including maximum contaminant levels (MCLs) previously established environmental action levels (EALs) and incident specific parameters (ISPs).

Synthetic Organic Compounds (SOCs)/Semi-Volatile Organic Compounds (SVOCs). SOCs and SVOCs may be used interchangeably and are man-made, organic



(carbon-based) chemicals that are less volatile than Volatile Organic Contaminants (VOCs). They are used as pesticides, defoliants, fuel additives, and as ingredients for other organic chemicals.

DOH Environmental Action Level (EAL). The DOH Environmental Action Levels (EALs) are concentrations of contaminants in drinking water and other media (e.g., soil, soil gas, and groundwater) below which the contaminants are assumed to not pose a significant threat to human health or the environment. Exceeding these EAL does not necessarily indicate that contamination at the site poses environmental hazards but generally warrants additional investigation.

Total Petroleum Hydrocarbons (TPH). TPH is a term used to describe a large family of several hundred chemical compounds that come from crude oil. Crude oil is used to make petroleum products, which can contaminate the environment. TPH is comprised of detected results from TPH-Gasoline, TPH-Diesel, and TPH-Oil.

Total Organic Carbon (TOC). TOC is naturally present in the environment, but also can be an indicator of contamination, including petroleum or other sources.

Free Chlorine. Chlorine is added to drinking water as part of the treatment process. Adding chlorine is the most common way to disinfect drinking water. Disinfection kills bacteria, viruses, and other microorganisms that could cause disease or illness. Chlorine is effective and continues to keep the water safe as it travels from the treatment plant to the consumer's tap. Chlorine measurements provide another line-of-evidence for evaluating drinking water quality.

Total Trihalomethanes (TTHM). TTHM is the sum of the concentration in milligrams per liter of the trihalomethane compounds (trichloromethane [chloroform], dibromochloromethane, bromodichloromethane and tribromomethane [bromoform]).

Units. A unit is the concentration of contaminant found in the water. For this report, the units are expressed in U.S. Standard Units.

U.S. Standard Unit (Name)	Acronym	Equivalent International System of Units (Name)	Acronym
parts per billion	ppb	micrograms per Liter	μg/L

Volatile Organic Compounds (VOCs). VOCs are a class of chemicals that contain carbon and evaporate, or volatilize, easily into air at room temperature. VOCs are found in a variety of commercial, industrial, and residential products, including gasoline, solvents, cleaners and degreasers, paints, inks and dyes, and pesticides.